


RPMA-8.0/OF

8 Amp
1/32 Brick
Open Frame
Single Output

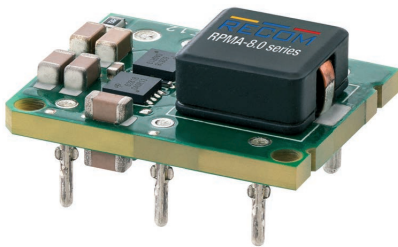

UL/CSA 62368-1 certified

Features

Switching Regulator

- 8A industrial grade non-isolated DC/DC
- Compact, industry standard 1/32nd brick format
- Efficiency up to 98%
- 9-53V input voltage
- 3.3-16.5V adjustable output voltage

Description

The RPMA5.0-8.0/OF is a high efficiency non-isolated buck converter with up to 8A output current in a 1/32nd brick footprint. The input voltage range is from 9-53VDC, and the output voltage is trimmable from 3.3-16.5VDC via a fixed trim resistor. Typical applications for these highly compact, reliable converters include distributed power architecture voltage conversion from 12, 24, 28, 36, and 48V bus systems for industrial, medical, test and measurement, and telecom equipment. With an efficiency up to 98%, the converter operates at temperatures from -40°C to +85°C and comes with RECOM's standard 3 year warranty.

Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage Adjustment Range ⁽¹⁾ [VDC]	Max. Output Current [A]	Efficiency typ. ⁽²⁾ [%]
RPMA5.0-8.0/OF	9-53	3.3-16.5	8	96.5

Notes:

Note1: External trim resistor is mandatory, do not leave floating

Note2: Efficiency tested at $V_{IN}=24VDC$, full load and $V_{OUT}=24VDC$

Model Numbering

RPMA5.0-8.0/OF

└─ Open Frame package
└─ Max. Output Current

Specifications (measured @ $T_a = 25^\circ\text{C}$, full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS


Parameter	Condition	Min.	Typ.	Max.
Absolute Maximum Input Voltage		-0.25VDC		55VDC
Input Voltage Range		9VDC		53VDC
Under Voltage Lockout (UVLO)	DC-DC ON DC-DC OFF hysteresis		8VDC 7VDC 1VDC	
Input Current	$V_{IN} = 18\text{VDC}$, $V_{OUT} = 15\text{VDC}$, full load			10A
Inrush Current				1A ² s
Quiescent Current	$V_{IN} = 24\text{VDC}$, $V_{OUT} = 12\text{VDC}$, no load		75mA	
Output Voltage Trimming	refer to "OUTPUT VOLTAGE TRIMMING"	3.3VDC		16.5VDC
Output Current	$V_{OUT} \geq 6.5\text{VDC}$ $V_{OUT} < 6.5\text{VDC}$			6A 8A
Minimum Load		0%		
Start-up Time	power up / CTRL ON/OFF		11ms	
Rise Time			7ms	
ON/OFF CTRL	DC-DC ON DC-DC OFF		Short or $0\text{VDC} < V_{CTRL} < 0.5\text{VDC}$ Open or $3.1\text{VDC} < V_{CTRL} < 13.2\text{VDC}$	
Input Current of CTRL Pin	DC-DC OFF		1mA	
Internal Operating Frequency			300kHz	
Output Ripple and Noise	20MHz BW, 1 μF ceramic capacitor and 22 μF ceramic capacitor		100mVp-p	
Reflected Back Ripple Current			94mA _{p-p}	
Remote Sense ⁽³⁾	% V_{OUT} nom.	0%		5%
Maximum Capacitive Load				1200 μF

Notes:


Note3: If sense function is not being used, connect Sense pin to +Vout pin

Efficiency vs. Output Current

$V_{OUT} = 3.3\text{VDC}$

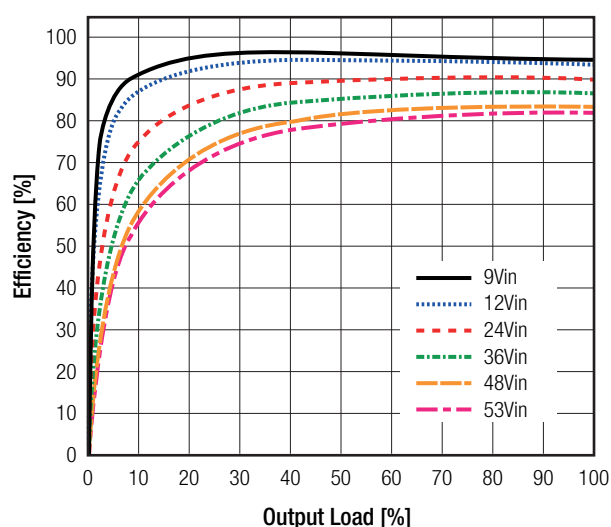



$V_{OUT} = 5\text{VDC}$

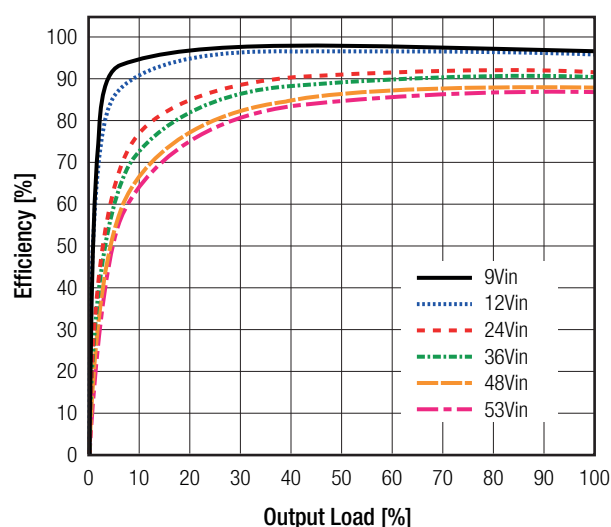



continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, full load and after warm-up unless otherwise stated)


Efficiency vs. Output Current

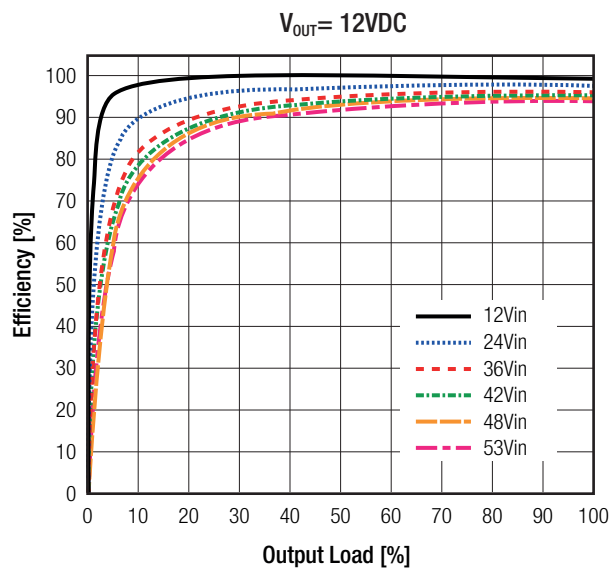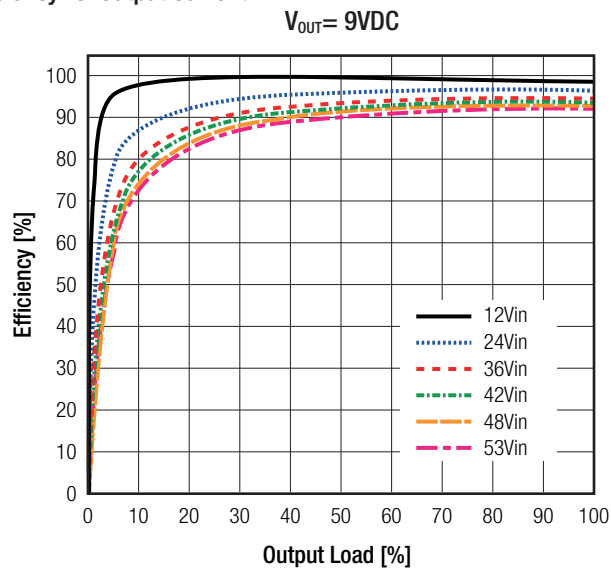

Efficiency vs. Output Current

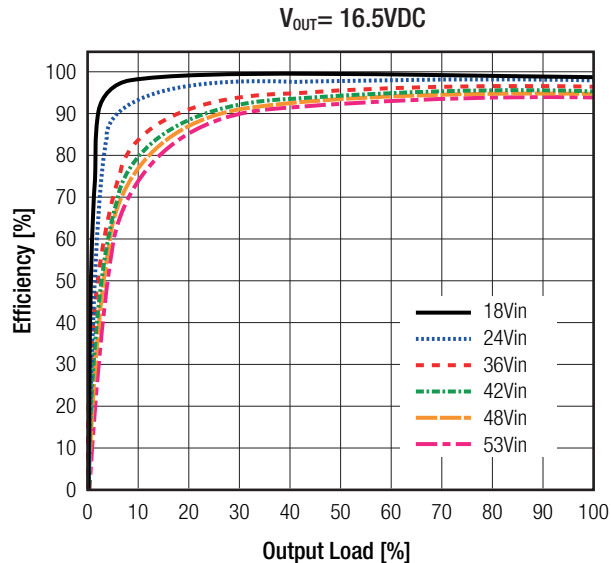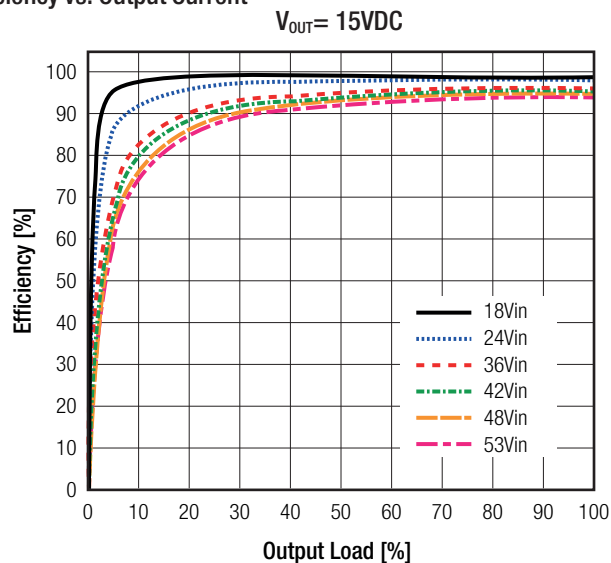


Output Voltage vs. Input Voltage

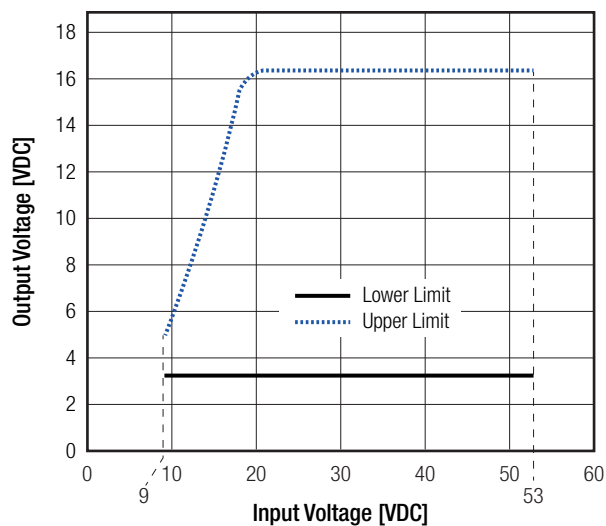

Specifications (measured @ Ta= 25°C, full load and after warm-up unless otherwise stated)

ON/OFF CTRL

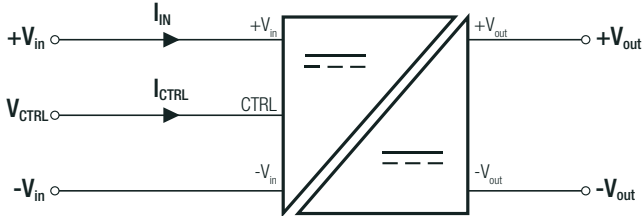

Negative Logic


DC-DC ON
DC-DC OFF

Short or 0VDC < V_{CTRL} < 0.5VDC
Open or 3.1VDC < V_{CTRL} < 13.2VDC

OUTPUT VOLTAGE TRIMMING

The output voltage of the RPMA5.0-8.0/OF can be trimmed between 3.3VDC and 16.5VDC by using an external trim resistor. The values for the trim resistor are according to standard E96 values; therefore, the specified voltage may slightly vary. Resistor values may be calculated with the following equation:

Calculation:



$$R_{trim} = \frac{V_{ref} \times k}{V_{OUTset} - 2.59} - 0.511 = k\Omega$$

V_{OUTnom} = nom. output voltage [VDC]
V_{OUTset} = trimmed output voltage [VDC]
V_{ref} = reference voltage [VDC]
R_{trim} = external trim resistor [kΩ]
k = trim factor [36.5]

Practical Example V_{OUTset}= 12VDC:

$$R_{trim} = \left[\frac{0.6VDC \times 36.5}{12 - 2.59} \right] - 0.511 = 1.816k\Omega$$

R_{trim} according to E96 ≈ **1k82Ω**

Practical Example V_{OUTset}= 15VDC:

$$R_{trim} = \left[\frac{0.6VDC \times 36.5}{15 - 2.59} \right] - 0.511 = 1.254k\Omega$$

R_{trim} according to E96 ≈ **1k24Ω**

V _{OUTset} =	3	5	9	12	15	[VDC]
R _{trim} E96 ≈	30k1	8k66	2k10	1k82	1k24	[Ω]

REGULATIONS

Parameter	Condition	Value
Output Accuracy	excluding trimming tolerances	±2.0% typ.
Line Regulation	low line to high line, full load	±0.2% typ.
Load Regulation	0% to 100% load	1.0% typ.
Transient Response	50% load step recovery time	360mV typ. 30μs typ.

Specifications (measured @ $T_a = 25^\circ\text{C}$, full load and after warm-up unless otherwise stated)

PROTECTIONS


Parameter	Condition	Value
Over Current Protection (OCP)		14A, hiccup mode
Over Temperature Protection (OTP)	on TC point	135°C, automatic restart

ENVIRONMENTAL


Parameter	Condition		Value
Operating Temperature Range	refer to below graphs		-40°C to +85°C
Maximum Case Temperature			+120°C
Operating Altitude			5000m
Operating Humidity	non-condensing		95% RH max.
Pollution Degree			PD2
MTBF	according to Telcordia SR332 Issue 3	80% load, $T_{AMB}=40^\circ\text{C}$, airflow= 1.5m/s	31500 x 10 ³ hours

Derating Graph (@ Chamber)


$V_{IN} = 24\text{VDC}$, $V_{OUT} = 5\text{VDC}$

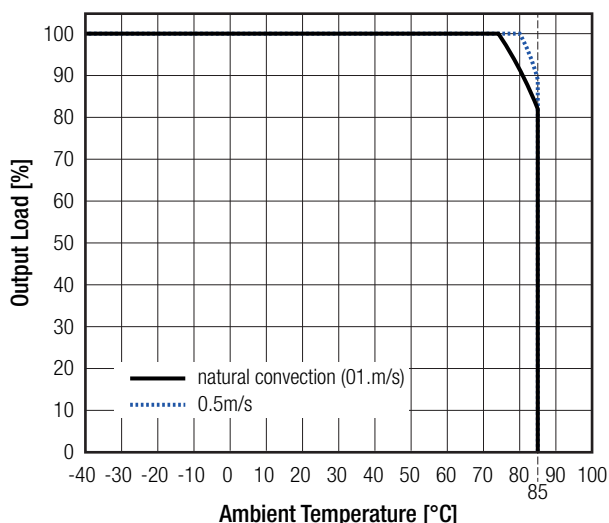


$V_{IN} = 24\text{VDC}$, $V_{OUT} = 12\text{VDC}$

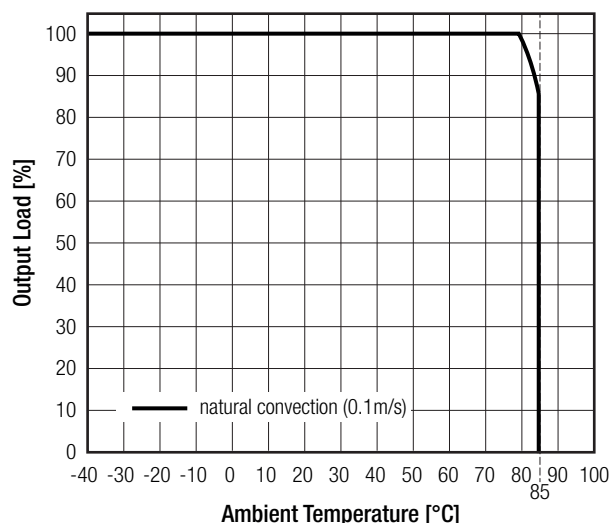

$V_{IN} = 36\text{VDC}$, $V_{OUT} = 5\text{VDC}$

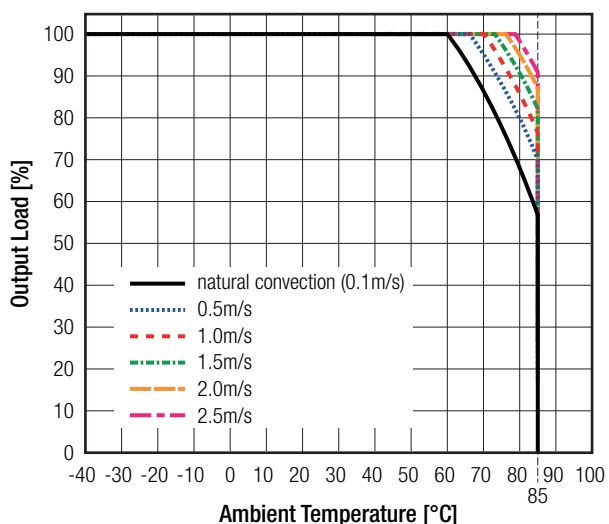


$V_{IN} = 36\text{VDC}$, $V_{OUT} = 12\text{VDC}$

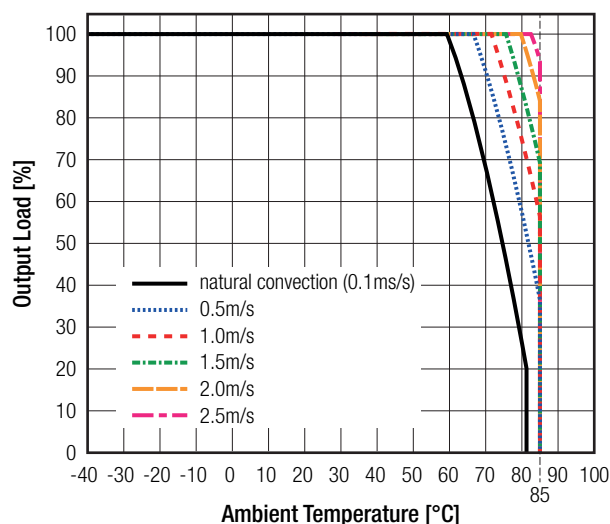

SAFETY AND CERTIFICATIONS

DIMENSION AND PHYSICAL CHARACTERISTICS

Dimension Drawing (mm)



Pin #	Function
-------	----------

Tolerance:

Bottom View

Dimensions: 13.64 (width), 15.24 (height), 7.62 (width), 11.43 (height), 3.81 (width), 7.62 (height), 1.06 (width), 2.66 (width).

Component locations: 1, 2, 3, 4, 5, 6, 7, 8.

1-6