

REDIIN480 Series ◊ DIN Rail Power Supply

480W ◊ Input: 100-240VAC

FEATURES

- Universal input voltage range 90-264VAC
- Built-In constant current circuit
- Power Factor >0.96 115VAC & >0.93 230VAC
- Two adjustable output variations 24-28V & 48-55V
- High power density with efficiency up to 93.5%
- Temperature range -30°C to +70°C
- Cold start capability -40°C
- Reduced no load power consumption <0.75W
- Width only 56mm
- Low weight only 870g
- 3 years warranty



Dimensions (HxWxD): 123.6 x 56.0 x 116.8mm (4.86 x 2.2 x 4.6 inch)
870g (1.92 lbs)

APPLICATIONS



SAFETY & EMC



DESCRIPTION

The REDIIN480 DIN rail power supply series is designed for cost sensitive users to fulfill essential features, needed for many general industrial applications, without compromising on quality and reliability in the Basic Features Market segment. The REDIIN480 series delivers 480W output power in an extremely compact dimension of only 123.6 x 56.0 x 116.8mm. Two adjustable output variations from 24V to 48V are available. The convection-cooled units will operate full power from -30°C to +50°C (230VAC). It can operate in constant current mode, making it suitable for inductive and capacitive loads. The product is certified according to safety standards IEC/EN/UL 62368-1, IEC/EN/UL61010-1 and IEC/EN/UL/CSA61010-2-201. Electromagnetic radiated and conducted emissions are compliant to heavy industrial EN 61000-6-4 Class B Emission standard and EN 61000-6-2 Immunity standard. The product complies with environmental protection requirements as per RoHS Directive.

SELECTION GUIDE

| Part Number | Input Voltage | Output Voltage | Output | Output Current | Efficiency ⁽¹⁾ | Output Power |
|--------------|---------------|----------------|---------------------|----------------|---------------------------|--------------|
| | Range [VAC] | nom. [VDC] | Adjustability [VDC] | max. [A] | typ. [%] | max. [W] |
| REDIIN480-24 | 90-264 | 24 | 24-28 | 20 | 93 | 480 |
| REDIIN480-48 | 90-264 | 48 | 48-55 | 10 | 93.5 | 480 |

Note1: Efficiency is tested at nominal input (230VAC) and full load at +25°C ambient

REDIIN480 Series ◊ DIN Rail Power Supply

480W ◊ Input: 100-240VAC



BASIC CHARACTERISTICS (measured @ $T_{AMB} = 25^{\circ}C$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

| Parameter | Condition | Min. | Typ. | Max. |
|---|--------------------|--------------|-------|----------|
| Nominal Input Voltage | 50/60Hz | 100VAC | | 240VAC |
| Operating Range | 47-63Hz | 90VAC | | 264VAC |
| Input Current | 115VAC | | 4.7A | |
| | 230VAC | | 2.4A | |
| Inrush Current | 230VAC, cold start | | | 40A |
| No Load Power Consumption | 115/230VAC | | | 750mW |
| Input Frequency Range | | 47Hz | | 63Hz |
| Output Adjustability ⁽²⁾ | REDIIN480-24 | 24VDC | | 28VDC |
| | REDIIN480-48 | 48VDC | | 55VDC |
| Power Factor | 115VAC | | 0.96 | |
| | 230VAC | | 0.93 | |
| Start-up time | 115/230VAC | REDIIN480-24 | 500ms | |
| | | REDIIN480-48 | 800ms | |
| Rise time | 115/230VAC | | 30ms | |
| Hold-up time | 115/230VAC | | 25ms | |
| Periodic and Random Deviation PARD ⁽³⁾ | REDIIN480-24 | 0°C to 70°C | | 150mVp-p |
| | | -30°C to 0°C | | 450mVp-p |
| | REDIIN480-48 | 0°C to 70°C | | 200mVp-p |
| | | -30°C to 0°C | | 600mVp-p |

Note2: Refer to „Adjust“ in dimension drawing.

Note3: Measured at 20MHz bandwidth with an AC coupling mode, 5cm wires, 0.1µF MLCC and µF E-cap in parallel.

REDIIN480-24

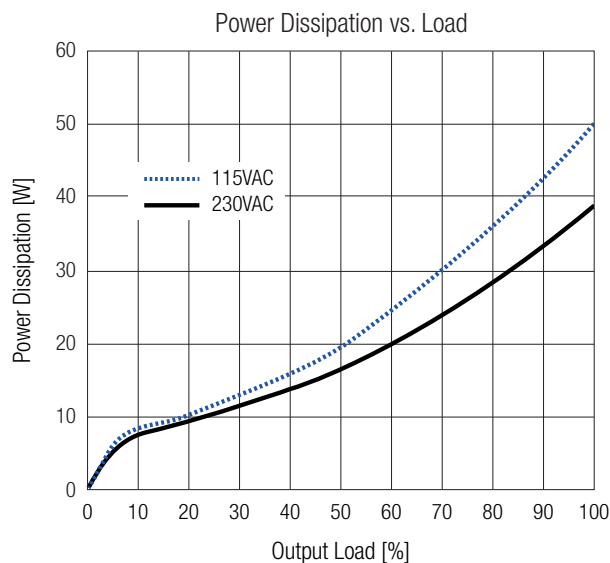
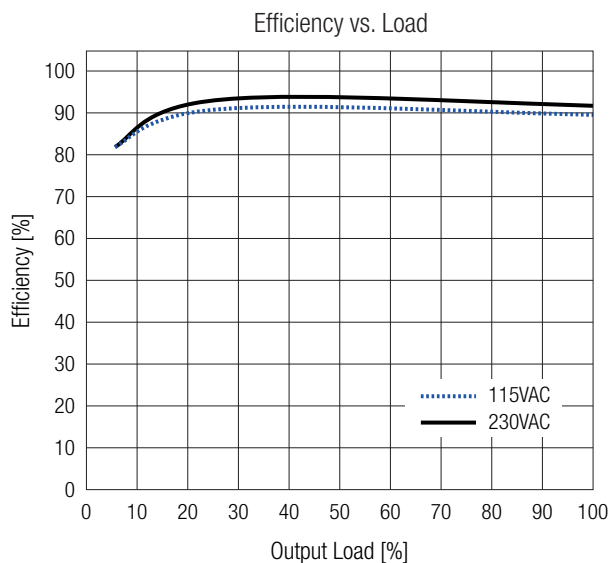


REDIIN480 Series \diamond DIN Rail Power Supply

480W \diamond Input: 100-240VAC

BASIC CHARACTERISTICS (measured @ $T_{AMB}= 25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

REDIIN480-24

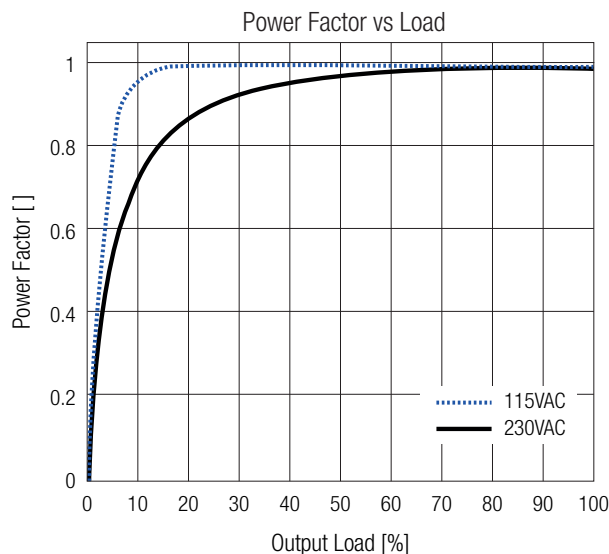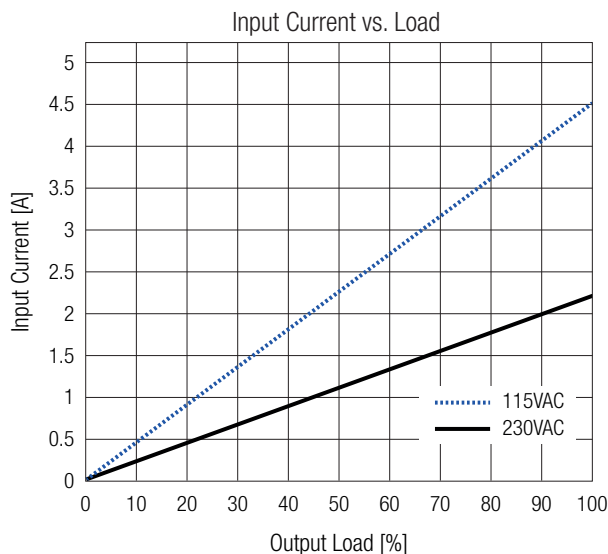

REGULATIONS

(measured @ $T_{AMB}= 25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

| Parameter | Condition | Value |
|---------------------------------|--|---------------------|
| Output Accuracy | | $\pm 1.0\%$ max. |
| Line Regulation | low line to high line, full load | $\pm 0.5\%$ max. |
| Load Regulation | 0% to 100% load | $\pm 0.5\%$ max. |
| Max. Capacitive Load (start-up) | REDIIN480-24 | 8000 μF |
| | REDIIN480-48 | 3000 μF |
| Transient Response | 115V/230VAC, 10-100% load | $\pm 10\%$ typ. |
| | recovery time (50% duty cycle @ 5Hz & 10kHz) | 2.5A/ μs |

PROTECTIONS

(measured @ $T_{AMB}= 25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

| Parameter | Type | Value | |
|---|--------------------------------------|--|------------------|
| Internal Input Fuse | | F10AH/250V | |
| Short Circuit Protection (SCP) | | hiccup mode, auto recovery | |
| Over Voltage Protection (OVP) | SELV output | REDIIN480-24 | 34VDC, latch off |
| | | REDIIN480-48 | 68VDC, latch off |
| Over Voltage Category (OVC) | | OVC II | |
| Over Current Protection (OCP) | refer to „Over Current Protection“ | 105% - 150% of rated load current, auto recovery | |
| Over Temperature Protection (OTP) | | latch off | |
| Class of Equipment | | Class I with PE connection | |
| Isolation Voltage (safety certified) ⁽⁴⁾ | 1 minute | I/P to O/P | 3kVAC |
| | | I/P to PE | 2kVAC |
| | | O/P to PE | 1kVAC |
| Leakage Current | 240VAC/50Hz | 1.5mA max. | |
| Power OK LED | normal mode, no protection activated | green light | |

Note4: For repeat Hi-Pot testing, reduce the time and/or the test voltage

REDIIN480 Series \diamond DIN Rail Power Supply


480W \diamond Input: 100-240VAC



PROTECTIONS (measured @ $T_{AMB}= 25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

Over Current Protection

The unit operates in a constant voltage mode within its rated load range. When exceeding the maximum current rating by 105% to 150% of its nominal rating the unit enters into a limited-current mode which drives the output voltage to approximately 80% of its nominal set point. Further increased load leading the units into a hiccup mode with automated restart.

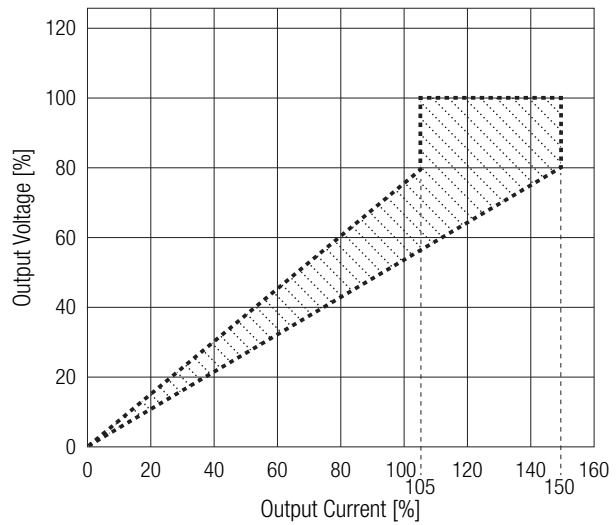

ENVIRONMENTAL (measured @ $T_{AMB}= 25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)


| Parameter | Condition | | Value |
|--|---|---------------|--|
| Operating Ambient Temperature Range ⁽⁶⁾ | @ natural convection (0.1m/s) | with derating | -30°C to +70°C |
| | | full load | refer to „Derating Graph“ |
| Operating Altitude ⁽⁵⁾ | | | 5000m |
| Operating Humidity | non-condensing | | 20% - 90% RH max. |
| Pollution Degree | | | PD2 |
| Shock | according to IEC 60068-2-27 | operating | Half Sine Wave: 10G/11ms; 1 time in X axis |
| | | non-operating | Half Sine Wave: 50G/11ms; 3 time per direction, 9 times total |
| Vibration | according to IEC 60068-2-26 | operating | Sine Wave: 10Hz to 500Hz @ 19.6m/s ² (2G peak); 10 min per cycle, 60 min for X direction |
| | | non-operating | Random: 5Hz to 500Hz; 2.09Grms; 20 min per axis for all X, Y, Z directions |
| MTBF | according to telcordia SR-332, 115/230VAC | | 700 x 10 ³ hours |

Note5: Recognized by safety agency for safe operation up to 5000m. High altitude operation may impact the performance and lifetime

Derating Graph

(@ Chamber and natural convection 0.1m/s)

Note6: cold start capability -40°C; between -40°C and -30°C may exceed limits. Guaranteed start up above -30°C

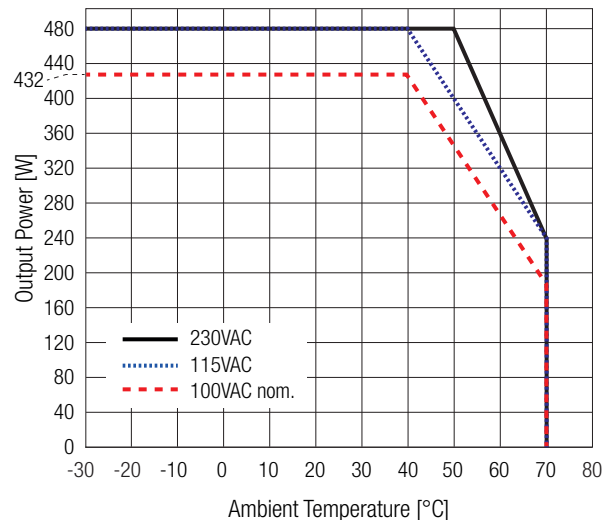

REDIIN480 Series ◊ DIN Rail Power Supply

480W ◊ Input: 100-240VAC

SAFETY & CERTIFICATIONS

| Certificate Type (Safety) | Report Number | Standard |
|--|--------------------------|---|
| Audio/Video, information and communication technology equipment - Part1: Safety requirements (CB) | CN23FXWD-001 | IEC62368-1:2014 2nd Edition |
| Audio/Video, information and communication technology equipment - Part1: Safety requirements | | EN62368-1:2014 + A11:2017 |
| Audio/Video, information and communication technology equipment - Part1: Safety requirements | E224736 | UL62368-1:2014 CAN/CSA-C22.2 No. 62368-1:2014 |
| Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements (CB) | E338991-D1020-1-A0-C0-CB | IEC61010-1:2010+A1:2016, 3rd Edition |
| Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements | | EN61010-1:2010+A1:2019 |
| Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements | E470721 | UL61010-1, 3rd Edition, 2012-05-11 CSA C22.2 No. 61010-1, 3rd Ed. 2012-01-01 |
| Electrical Equipment For Measurement, Control, and Laboratory Use; Part 2-201: Particular requirements for control equipment (CB Scheme) | E338991-D1020-1-A0-C0-CB | IEC61010-2-201:2017, 2nd Edition |
| Electrical Equipment For Measurement, Control, and Laboratory Use; Part 2-201: Particular requirements for control equipment | | EN IEC 61010-2-201:2018 |
| Electrical Equipment For Measurement, Control, and Laboratory Use; Part 2-201: Particular requirements for control equipment | E470721 | UL61010-2-201, 2nd Edition CSA C22.2 No. 61010-2-201, 2nd Edition |
| RoHS2 | | RoHS 2011/65/EU + AM2015/863 |

| EMC Compliance according to EN55032/35 | Condition | Standard / Criterion |
|---|--|--|
| Electromagnetic compatibility of multimedia equipment - Emission requirements | | EN55032:2015+A11:2020, Class B |
| Electromagnetic compatibility of multimedia equipment - Immunity requirements | | EN55035:2017+A11:2020 |
| ESD Electrostatic discharge immunity test (level 4) | Air: ±2, 4, 8, 15kV Contact ±2, 4, 6, 8kV | IEC61000-4-2:2008 , Criteria A EN61000-4-2:2009, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test (level 2) | 3V/m (80-1000MHz) 3V/m (1800, 2600, 3500, 5000MHz) | IEC/EN61000-4-3:2006+A2:2010, Criteria A |
| Fast Transient and Burst Immunity (level 3) | AC Power Port: L, N, PE, L-N-PE: 1kV | IEC/EN61000-4-4:2012, Criteria A |
| Surge Immunity (level 4) | AC Power Port: L-N: 0.5, 1, 2kV L-PE, N-PE: 0.5, 1, 2kV | IEC/EN61000-4-5:2014+A1:2017, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields (level 2) | 3Vrms (0.15-30MHz) 3-1Vrms (10-30MHz) 1Vrms (30-80MHz) | IEC61000-4-6:2013, Criteria A EN61000-4-6:2014, Criteria A |
| Power Magnetic Field Immunity (level 2) | 1A/m 50Hz | IEC61000-4-8:2009, Criteria A EN61000-4-8:2010, Criteria A |
| Voltage Dips | 100/230/240VAC, 50Hz >95%, 0.5 cycles; 30%, 25 cycles | IEC/EN61000-4-11:2004+A1:2017, Criteria A |
| Voltage Interruptions | 100/230/240VAC, 50Hz >95%, 250 cycles | IEC/EN61000-4-11:2004+A1:2017, Criteria B |
| Limits of Harmonic Current Emissions | meets standard up to 100W P _{OUT} | EN IEC 61000-3-2:2019 |
| Limits of Voltage Fluctuations & Flicker | | EN61000-3-3:2013+A1:2019 |

| EMC Compliance according to EN61204-3 | Condition | Standard / Criterion |
|---|--|---|
| Low voltage power supplies, d.c. output Part 3: Electromagnetic compatibility | | EN61204-3:2000, Class A |
| ESD Electrostatic discharge immunity test | Air: ±2, 4, 8, 15kV Contact: ±2, 4, 6, 8kV | IEC61000-4-2:2008, Criteria A EN61000-4-2:2009, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | 3V/m (80-1000MHz, 895-905MHz, 1400-2000MHz, 2000-2700MHz) | IEC/EN61000-4-3:2006+A2:2010, Criteria A |
| Fast Transient and Burst Immunity | AC Power Port: L, N, PE, L-N-PE: 1kV | IEC/EN61000-4-4:2012, Criteria A |
| Surge Immunity | AC Power Port: L-N: 0.5, 1, 2kV AC Power Port: L-PE, N-PE: 0.5, 1, 2, 4kV | IEC/EN61000-4-5:2014+A1:2017 Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | 3Vrms (0.15-80MHz) | IEC61000-4-6:2013, Criteria A EN61000-4-6:2014, Criteria A |
| Voltage Dips | 100/230/240VAC, 50Hz 30%, 60% | IEC/EN61000-4-11:2004+A1:2017, Criteria A |
| Voltage Interruptions | 100/230/240VAC, 50Hz >95% | IEC/EN61000-4-11:2004+A1:2017, Criteria B |
| Limits of Harmonic Current Emissions | | EN IEC 61000-3-2:2019 |
| Limits of Voltage Fluctuations & Flicker | | EN61000-3-3:2013+A1:2017 |

REDIIN480 Series ◇ DIN Rail Power Supply

480W ◇ Input: 100-240VAC

SAFETY & CERTIFICATIONS

| EMC Compliance according to IEC/EN61000-6-4/6-2 | Condition | | Standard / Criterion |
|---|---|---|---|
| Electromagnetic compatibility (EMC) - Part 6-4: Generic standards - Emission standard for industrial environments | | | IEC61000-6-4:2006+A1:2010 EN61000-6-4:2007+A1:2011 |
| Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity standard for industrial environments | | | IEC/EN61000-6-2:2005 |
| ESD Electrostatic discharge immunity test | Air: ±2, 4, 8, 15kV Contact: ±2, 4, 6, 8kV | | IEC61000-4-2:2008, Criteria A EN61000-4-2:2009, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | 10V/m (80-1000MHz) 3V/m (1400-6000MHz) | | IEC/EN61000-4-3:2006+A2:2010, Criteria A |
| Fast Transient and Burst Immunity | AC Power Port: L, N, PE, L-N-PE: 2kV | | IEC/EN61000-4-4:2012 Criteria A |
| Surge Immunity | AC Power Port L-N: 0.5, 1, 2kV; L-PE, N-PE: 0.5, 1, 2, 4kV | | IEC/EN61000-4-5:2014+A1:2017, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | 10Vrms (0.15-80MHz) | | IEC61000-4-6:2013, Criteria A EN61000-4-6:2014, Criteria A |
| Power Magnetic Field Immunity | 30A/m, 50/60Hz | | IEC61000-4-8:2009, Criteria A EN61000-4-8:2010, Criteria A |
| Voltage Dips | 100VAC, 50Hz | 30%, 25/30 cycles; 100%, 1 cycle | IEC61000-4-11:2004+A1:2017, Criteria A |
| | | 60%, 10/12 cycles | IEC61000-4-11:2004+A1:2017, Criteria B |
| | 230/240VAC, 50Hz | 100%, 1 cycle; 60%, 10 cycles; 30%, 25 cycles | IEC61000-4-11:2004+A1:2017, Criteria A |
| Voltage Interruptions | 100/230/240VAC, 50Hz | 100%, 250/300 cycles | IEC/EN61000-4-11:2004+A1:2017, Criteria B |
| Limits of Harmonic Current Emissions | | | EN IEC 61000-3-2:2019 |
| Limits of Voltage Fluctuations & Flicker | | | EN61000-3-3:2013+A1:2017 |

DIMENSION & PHYSICAL CHARACTERISTICS



| Parameter | Type | Value |
|-------------------|--------------------|---|
| Material | chassis | aluminum |
| Dimension (HxWxD) | | 123.6 x 56.0 x 116.8mm 4.86 x 2.2 x 4.6 inch |
| Weight | with mounting clip | 870g 1.92 lbs |

REDIIN480 Series \diamond DIN Rail Power Supply

480W \diamond Input: 100-240VAC

DIMENSION & PHYSICAL CHARACTERISTICS

Dimension Drawing (mm)

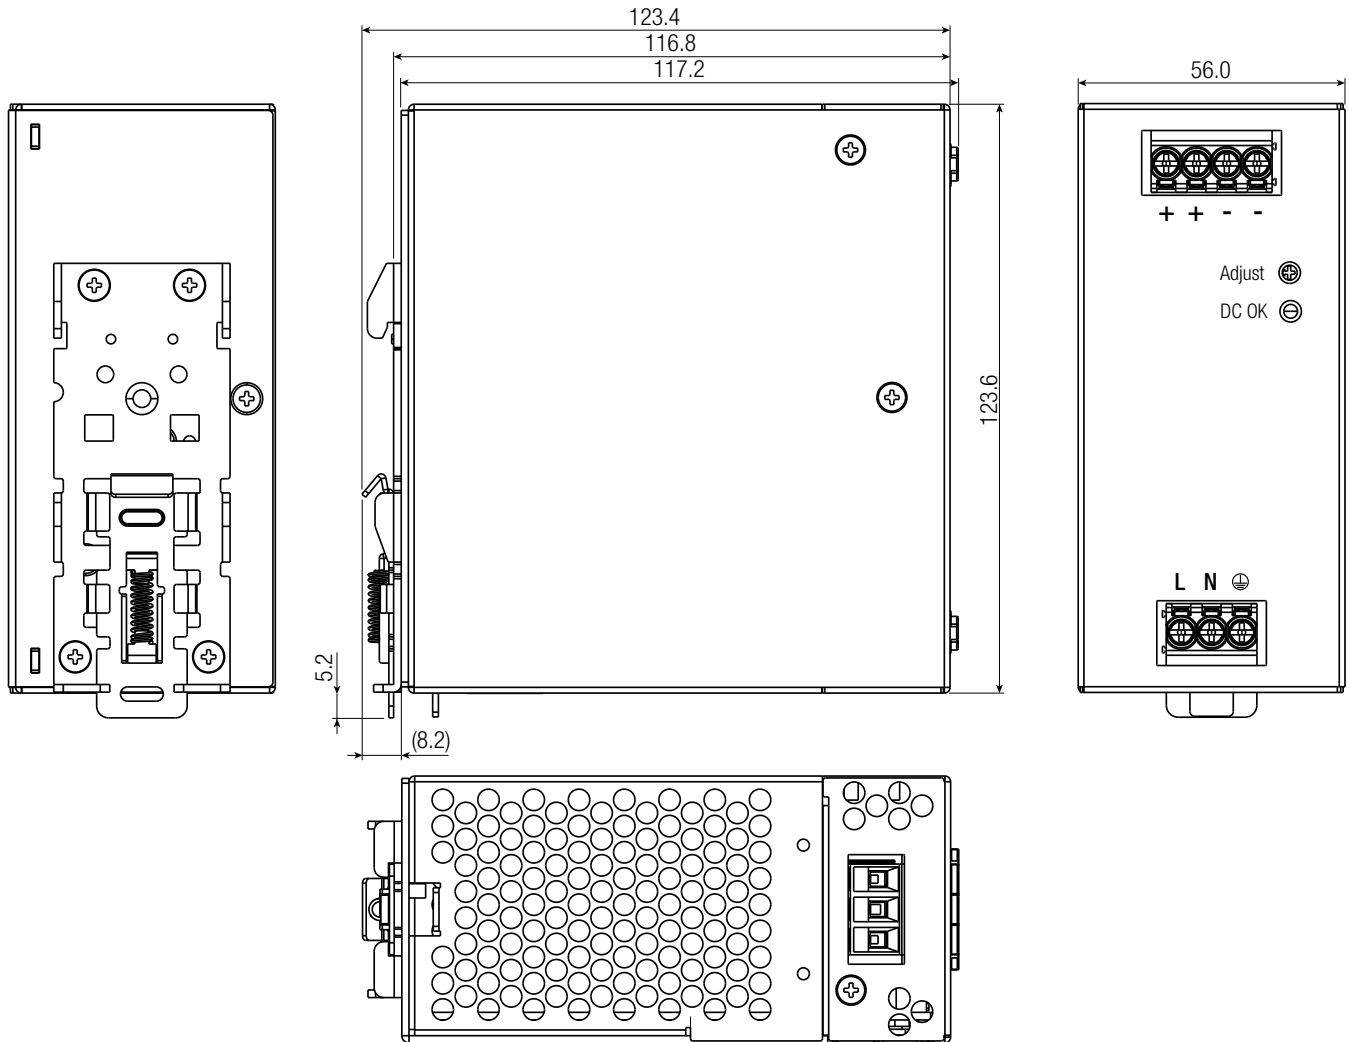

Use flexible (stranded wire) or solid cables with the following wire cross-section is recommended.

Ferrules are required for flexible cables.

Use copper conductors designed for an operating temperature of at least 105°C.

Screw Terminal Information

| Function | AWG | mm ² | Tightening Torque |
|-------------|-------|-----------------|-------------------|
| VAC in L | 14-12 | 2.1-3.3 | 0.6Nm |
| VAC in N | 14-12 | 2.1-3.3 | 0.6Nm |
| PE \oplus | 14-12 | 2.1-3.3 | 0.6Nm |
| -Vout | 14-12 | 2.1-3.3 | 0.4Nm |
| +Vout | 14-12 | 2.1-3.3 | 0.4Nm |

Wire stripping length: 8mm


Tolerance: $\pm 0.5\text{mm}$

INSTALLATION & APPLICATION


Mounting Instruction

Mounting Rail: Standard TS35 DIN Rail in accordance with EN 60715

Mounting

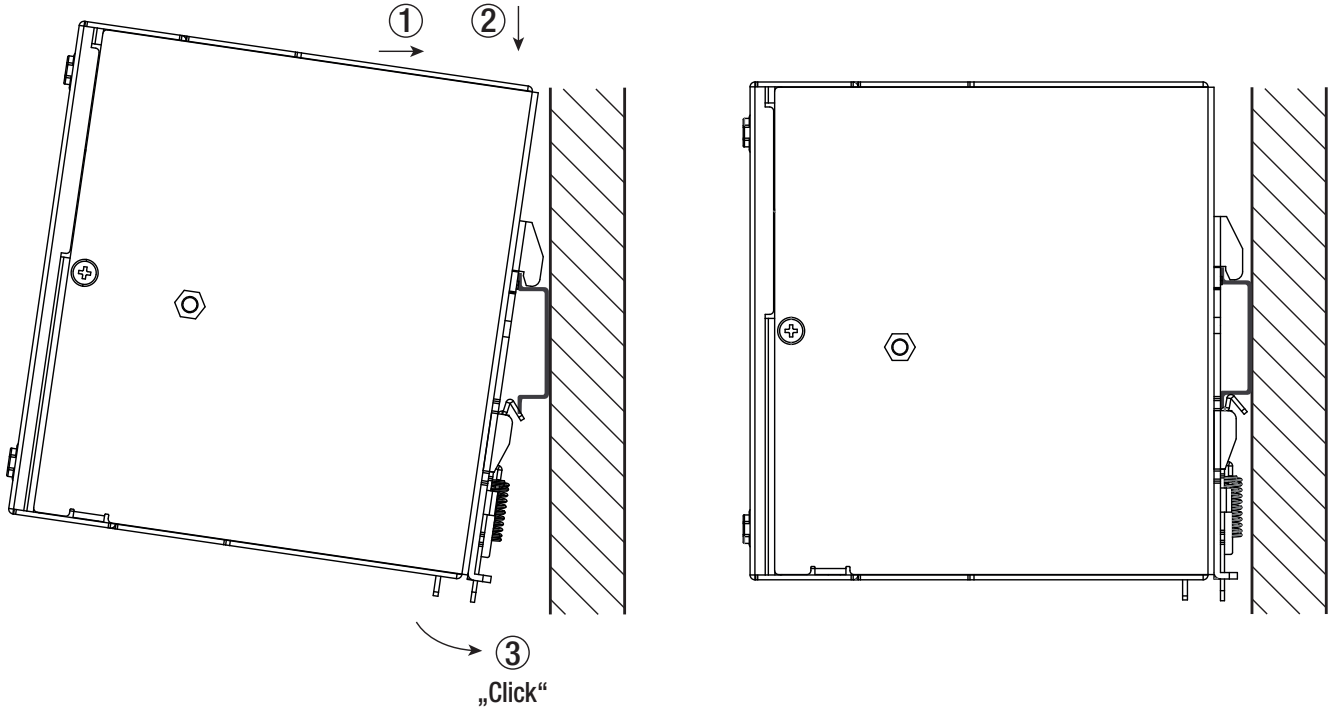


Release

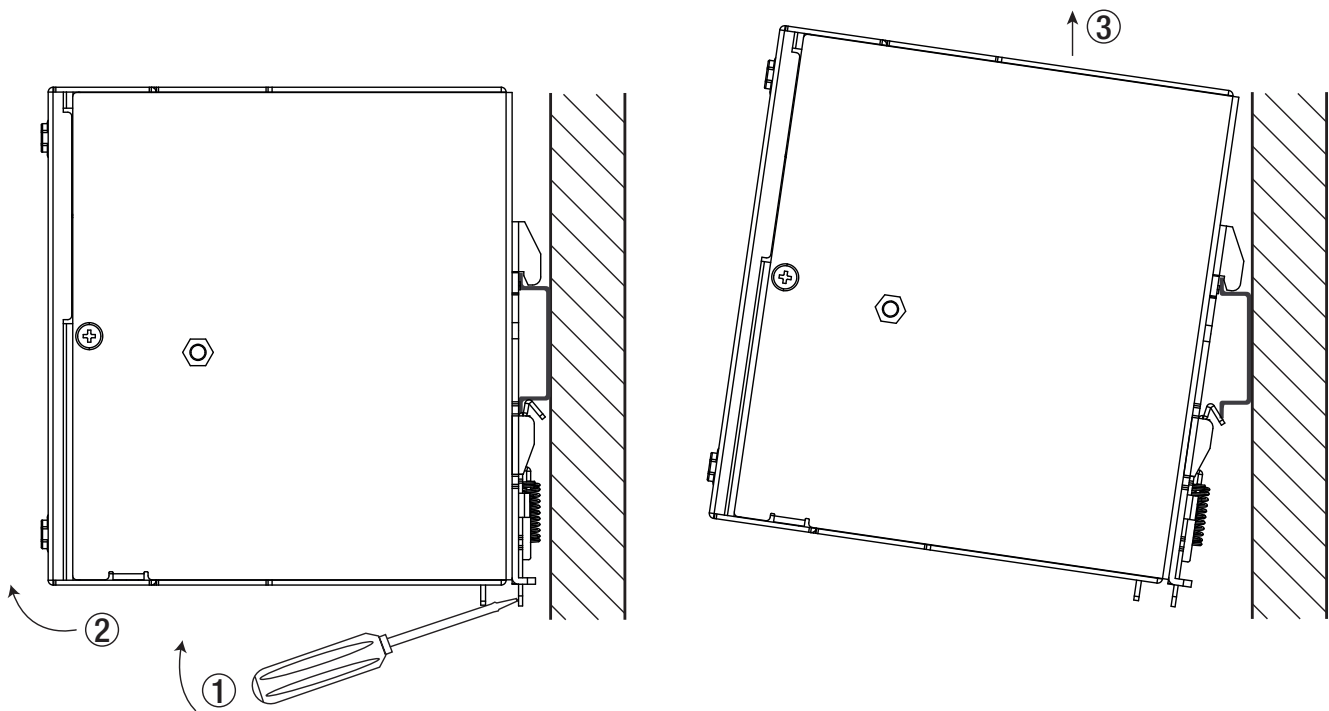


INSTALLATION & APPLICATION

Multiple Mounting

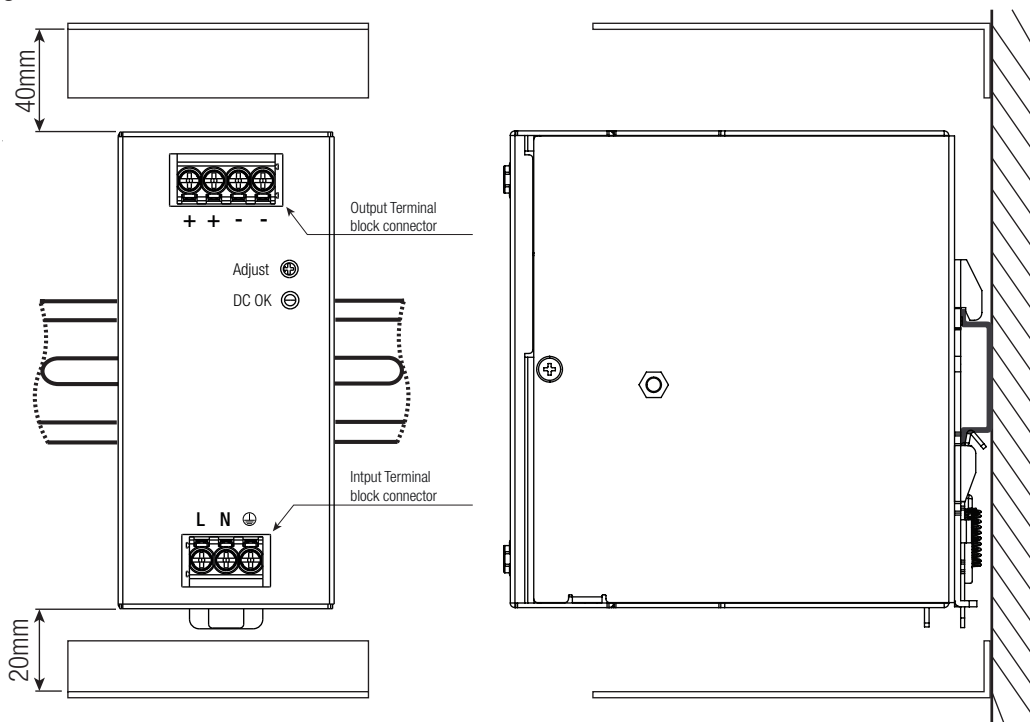

Note7: To guarantee sufficient convection cooling, keep a distance of 40mm above and 20mm below the device. For vertical mounting the device should be installed with the input terminal on the bottom.

BLOCK DIAGRAM

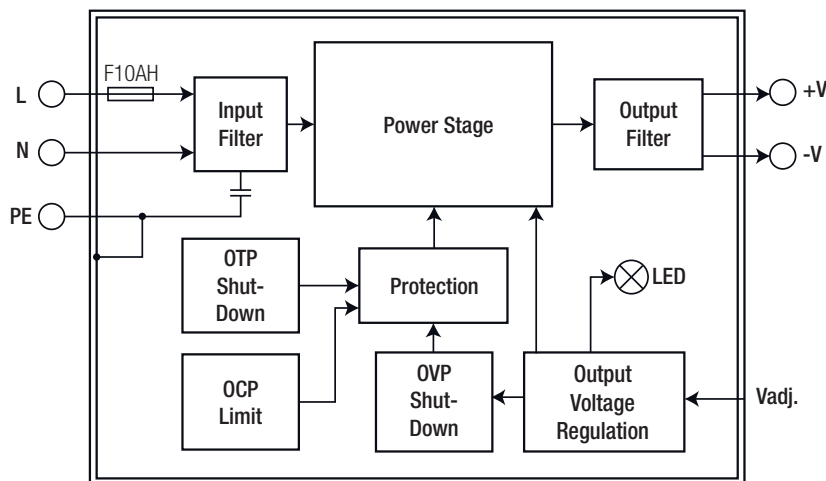

PACKAGING INFORMATION

| Parameter | Type | Value |
|-----------------------------|----------------|-------------------------|
| Packaging Dimension (LxWxH) | cardboard box | 505.0 x 305.0 x 226.0mm |
| Packaging Quantity | | 7pcs |
| Storage Temperature Range | | -40°C to +85°C |
| Storage Humidity | non-condensing | 5% - 95% RH max. |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.