### **Features**

- Compact 10.35 x 7.5mm SMD package
- Low profile (2.5mm)
  - 3kVDC/1min isolation
- Low EMI emissions
- Ultra-wide temperature range -40°C to +125°C

### Regulated Converters

- Fully automated, high-reliability design
- Semi-regulated 5V output

### Description

The R05C05TE05S is a low cost, low profile, 0.5W SMD isolated DC/DC single output converter with 4.5-5.5V input range and a semi-regulated 5V output. There is no minimum load requirement which is ideal for applications which switch into very light load operation modes. The device is also able to deliver a 600mW for applications requiring additional power for short peak operation modes. Standard isolation is 3kVDC/1min, and the operating temperature is from -40°C up to +125°C with derating. The fully-automated design which is equipped with short-circuit, over-current, and over-temperature protection ensures the highest reliability in applications such as communication, current sensing, and COM port isolation.

<b>Selection Guide</b>				
Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Power [W]	Efficiency typ. <sup>(1)</sup> [%]
R05C05TE05S	4.5-5.5	5	0.5	53

Notes:

Note1: nom.  $V_{IN}$ = 5VDC,  $V_{OUT}$ = 5VDC, full load




### RxxC05TExxS

RECC

### 0.5 Watt 16-Pin SOIC Single Output



IEC/EN62368-1 3rd Edition certified CB Report

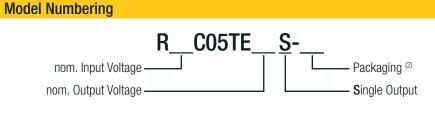

#### Notes:

Note2: add suffix "-R" for standard tape and reel packaging

add suffix "-CT" for bag packaging for more details refer to "PACKAGING INFORMATION"

ABSOLUTE MAXIMUM RATINGS <sup>(3)</sup>						
Parameter	Condition	Min.	Тур.	Max.		
	+V <sub>IN</sub> to -V <sub>IN</sub>	-0.3VDC		6VDC		
Absolute Maximum Voltage	$+V_{\text{IN}}$ to $-V_{\text{IN}}$ or $\text{SGND}_{\text{IN}}$	-0.3VDC		6VDC		
	$+V_{out}$ to $-V_{out}$ or SGND <sub>out</sub>	-0.3VDC		6VDC		
Operating IC Junction Temperature (T <sub>J</sub> )				+150°C		
Lead Temperature				+260°C		
Storage Temperature (T <sub>STO</sub> )		-65°C		+150°C		

Note3: Stresses beyond those listed under absolute maximum ratings can cause permanent damage to the device. (Values are at non-operating)


# RECOM DC/DC Converter

# RxxC05TExxS Series

#### Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Parameter	Condition	Min.	Тур.	Max.
Input Voltage Range		4.5VDC	5VDC	5.5VDC
Linder Veltage Leekeut (UVLO)	DC-DC ON		3.28VDC	
Under Voltage Lockout (UVLO)	DC-DC OFF		2.88VDC	
Under Voltage Lockout Hysteresis			190mV	
Innut Current Dange	$P_{out} = 0.5W$		240mA	
Input Current Range	$P_{OUT} = 0.6W$		255mA	
Quiescent Current			7mA	
Minimum Load		0%		
Internal Operating Frequency			30MHz	
Output Ripple Voltage			50mVp-p	100mVp-j

#### **Typical Application Circuit**

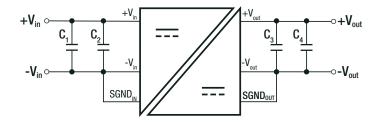


#### Input and Output Capacitors\*

	<b>C</b> <sub>1</sub>	<b>C</b> <sub>2</sub>	C <sub>3</sub>	<b>C</b> <sub>4</sub>
	10µF	0.1µF	10µF	0.1µF
_	*Henry concellant and an elekant for stable concertion			

\*these capacitors are mandatory for stable operation

#### Efficiency vs. Load

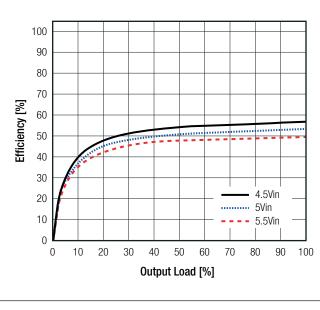

REGULATION				
Parameter	Condition	Min.	Тур.	Max.
Output Voltage Accuracy	V <sub>IN</sub> = 4.5-5.5VDC, load= 0A		±1.5%	
Line Regulation	V <sub>IN</sub> = 4.5-5.5VDC, load= 0.12A		±0.5%	
Load Regulation	0% - 100% load		1.0%	

## RECOM DC/DC Converter

# RxxC05TExxS

### **Series**

### Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)


PROTECTIONS			
Parameter	Condition	Values	
Short Circuit Protection (SCP)		continuous , hiccup mode	
Over Current Protection		220mA, hiccup mode	
Over Temperature Protection		automatic restart after cool down	
Thermal Chutdown	IC junction temperature	+160°C	
Thermal Shutdown	hysteresis	+20°C	
lealation Valtage	tested for 1second	3.6kVDC	
Isolation Voltage	rated for 1 minute	3kVDC	
Isolation Resistance	V <sub>ISO</sub> = 500VDC, 25°C	50G <b>Ω</b> typ.	
Isolation Capacitance		7pF typ.	
Isolation Grade	according to 62368-1	functional	
External Clearance		>8mm	
External Creepage		>8mm	


ENVIRONMENTAL				
Parameter	Condition		Value	
Operating Temperature Range	@ natural convection 0.1m/s	with derating	-40°C to +125°C	
FSD	human-body model (HBM), ANSI/ESDA/JEDEC JS-001		±6.0kV	
ESD	charged-device model (CDM), JEDEC JESD22-C101		±2.0kV	
Moisture Sensitive Level	MSL peak temp. <sup>(5)</sup>		Level 3, 260°C, 168hrs	
	junction to T <sub>AMB</sub>		63.8K/W	
Thermal Immedence (6)	junction to case (top)		21.4K/W	
Thermal Impedance (6)	junction to case (bottom)		37.2K/W	
	junction to board		38.5K/W	

#### Notes:

Note5: The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature Note6: Tested with 54.0 x 85.6mm 2 layer PCB with 105µm copper



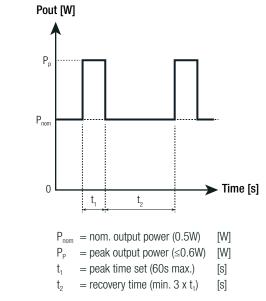

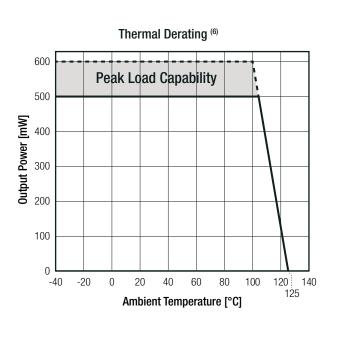


## RECOM DC/DC Converter

# RxxC05TExxS Series

### Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS				
Certificate Type (Safety)	Report Number	Standard		
Information Technology Equipment, General Requirements for Safety (CB Scheme)	DK-139515-A1-UL	IEC62368-1:2018, 3rd Edition		
Information Technology Equipment, General Requirements for Safety	S20230116152501	EN IEC 62368-1:2020 + A11:2020		
RoHS2		RoHS 2011/65/EU + AM2015/863		

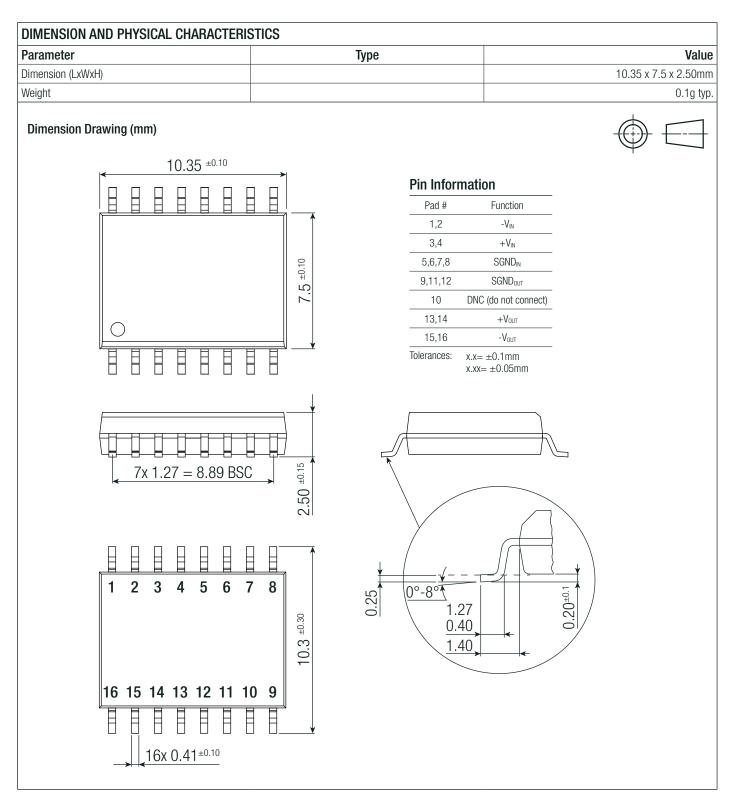




# RxxC05TExxS

### **Series**

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

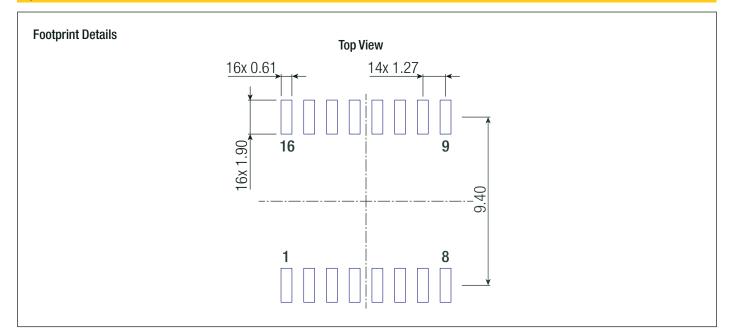

PACKAGING INFORMATION			
Parameter	Туре	Value	
	reel (diameter + width)	Ø177.8 + 24.4mm height	
Packaging Dimension (LxWxH)	tape and reel (carton)	260.0 x 240.0 x 60.0mm	
	moisture barrier bag ("-CT")	100.0 x 100.0 x 30mm	
Tape Width		24mm	
Packaging Quantity	tape and reel	500pcs	
	moisture barrier bag ("-CT")	10pcs	
Storage Temperature Range		-65°C to +150°C	

e product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The product ure not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.