## **Features**

## LED Driver

- Low profile case (13mm height max.)
- 12V and 24V constant voltage outputs
- Terminal block input/output with cable clamps
- Fully protected (OLP, SCP, OCP, OTP)
- Low standby power, ErP conform
- Low cost


#### **Description**

These low profile constant voltage LED drivers have been designed for cost-sensitive applications. The SELV outputs are suitable for both independently supplied or built-in power-supply LED luminaires. Their low profile design allows them to be invisibly built into furniture, discreetly mounted under shelves or integrated in space-restricted applications such as coving lighting, strip lighting or troffer lighting systems. The power supplies are short circuit and overload protected and come with a full 3-year warranty.



### **RACV12-LP**

# 12 Watt Constant Voltage Single Output



All LED Drivers may not be used without a load. They must be switched on the primary side only.

Noncompliance may damage the LED or reduce its lifetime.

















IEC/EN61347-1 certified IEC/EN61347-2-13 certified ENEC certified CB report EN55015 compliant

#### Specifications (measured @ Ta= 25°C, 240VAC and rated load)

BASIC CHARACTERISTICS			
Condition	Min.	Тур.	Max.
	198VAC	230VAC	264VAC
			8A
			50ms
	47Hz		63Hz
			0.4W
full load, 230VAC			0.55
full load	35kHz		140kHz
12Vout			600mVp-p
24Vout			500mVp-p
	full load, 230VAC full load 12Vout	Condition Min. 198VAC 47Hz  full load, 230VAC full load 35kHz 12Vout	Condition         Min.         Typ.           198VAC         230VAC           47Hz           full load, 230VAC           full load         35kHz           12Vout

REGULATIONS		
Parameter	Condition	Value
Output Accuracy		±5% max.
Line Regulation		3% max.
Load Regulation		3% max.

Note1: Measured at 20MHz Bandwidth using 0.1µF & 47µF parallel capacitor



# **RACV12-LP**

## **Series**

#### Specifications (measured @ Ta= 25°C, 240VAC and rated load)

PROTECTION			
Parameter	Condition	Value	
Input Fuse	external fuse is recommended	T1A	
Open Circuit Protection (OCP)		auto recovery after fault condition is removed	
Over Load Protection (OLP)		auto recovery after fault condition is removed	
Over Voltage Protection (OVP)		auto recovery after fault condition is removed	
Over Temperature Protection (OTP)	110°C Tcase	auto recovery after fault condition is removed	
Isolation Voltage	I/P to O/P	3.75kVAC / 1 minute	


#### Maximum loading of automatic circuit breakers

\* @ 230VAC, 10hm, 90° phase angle and max. load

Circuit Breaker	Circuit Breaker Current			
Тур	10A	16A	20A	25A
В	17	28	35	44
С	37	59	74	92

ENVIRONMENTAL			
Parameter	Condition	Value	
Operating Temperature Range		-20°C to +50°C	
Maximum Case Temperature		+85°C	
Operating Altitude		2000m	
Operating Humidity	non-condensing	5% to 85% RH	
IP Rating		IP20	
Pollution Degree		PD2	
Design Lifetime		30 x 10 <sup>3</sup> hours	

#### **Derating Graph**





# **RACV12-LP**

**Series** 

#### Specifications (measured @ Ta= 25°C, 240VAC and rated load)

SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Report Number	Standard
Lamp controlgear Part 1: General and safety requirements (CB Scheme)		IEC61347-1:2015+A1:2017, 3rd Edition
Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules (CB Scheme)	371338	IEC61347-2-13:2014+A1:2016, 2nd Edition
Lamp controlgear Part 1: General and safety requirements (LVD)		EN61347-1:2015
Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules (LVD)		EN61347-2-13:2014 + A1:2017
Lamp controlgear Part 1: General and safety requirements		EN61347-1:2008 + A2:2013
Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules	371338	EN61347-2-13:2014
DC or AC supplied electronic control gear for LED modules Performance requirements	371338	IEC62384:2006 1st Edition + A1:2009
DC or AC supplied electronic control gear for LED modules Performance requirements	371330	EN62384:2006 + A1:2009
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2		RoHS 2011/65/EU + AM2015/863
EMC Compliance	Condition	Standard / Criterion
Limits and methods of measurement of radio disturbance characteristics of electrical		EN55015:2013 + A1:2015
lighting and similar equipment	371338	LN33013.2013 + A1.2013
Equipment for general lighting purposes – EMC immunity requirements	3/1330	EN61547:2009
Assessment of lighting equipment related to human exposure to electromagnetic fields		EN62493:2015
ESD Electrostatic discharge immunity test	±8kV Air Discharge, ±4kV Contact Discharge	EN61000-4-2:2009, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m	EN61000-4-3:2006 + A2:2010, Criteria A
Fast Transient and Burst Immunity	±0.5kV (DC Output) ±1kV (AC Input)	EN61000-4-4:2012, Criteria A
Surge Immunity	±0.5kV (AC Input)	EN61000-4-5:2014 + A1:2017, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	AC Power Port 3V	EN61000-4-6:2014, Criteria A
Voltage Dips and Interruptions	Voltage Dips >95%	EN61000-4-11:2004 + A1:2017, Criteria B
Voltage Dips and Interruptions	Voltage Dips 30%	EN61000-4-11:2004 + A1:2017, Criteria B
Limits of Harmonic Current Emissions		EN61000-3-2:2014, Class C
Limits of Voltage Fluctuations & Flicker		EN61000-3-3:2013, Clause 5

DIMENSION and PHYSICAL CHARACTERISTICS			
Parameter	Туре	Value	
Material	case	plastic (UL94V-2)	
Dimension (LxWxH)		128.0 x 50.0 x 13.0mm	
Weight		70g	

continued on next page

www.recom-power.com

REV.: 2/2019


L-3




# RACV12-LP

**Series** 

#### Specifications (measured @ Ta= 25°C, 240VAC and rated load)

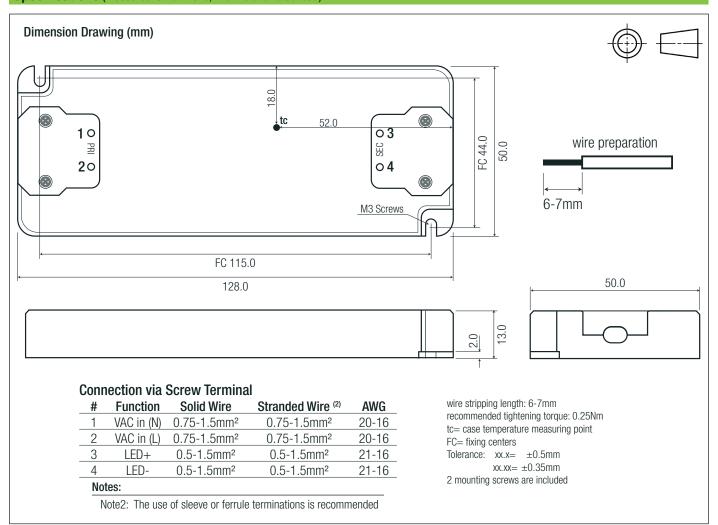

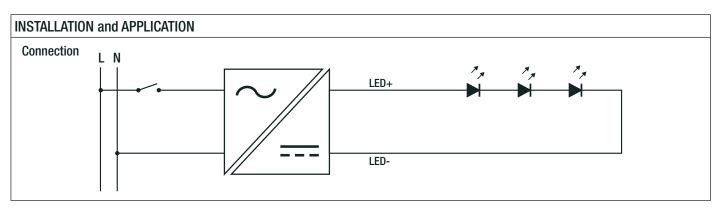

PACKAGING INFORMATION			
Parameter	Туре	Value	
Packaging Dimension (LxWxH)	agedbaard Day	265.0 x 139.0 x 62.0mm	
Packaging Quantity	cardboard Box	10pcs	
Storage Temperature Range		-20°C to +70°C	
Storage Humidity	non-condensing	5% - 85% RH	

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.