Features

LED Driver

- Low profile case (13mm height max.)
- 12V and 24V constant voltage outputs
- Terminal block input/output with cable clamps
- Fully protected (OLP, SCP, OCP, OTP)
- Low standby power, ErP conform
- Low cost

Description

These low profile constant voltage LED drivers have been designed for cost-sensitive applications. The SELV outputs are suitable for both independently supplied or built-in power-supply LED luminaires. Their low profile design allows them to be invisibly built into furniture, discreetly mounted under shelves or integrated in space-restricted applications such as coving lighting, strip lighting or troffer lighting systems. The power supplies are short circuit and overload protected and come with a full 3-year warranty.

| Selection Guide | | | | | | |
|-----------------|---------------------------------|--------------------------|----------------------------|---------------------------------|---------------------------|-----------------------------|
| Part Number | Input Voltage Range [VAC] | Input Current [mA] | Output Voltage [VDC] | Output Current Range [mA] | Efficiency typ. [%] | Output Power max. [W] |
| RACV20-12-LP | 198-264 | 210 | 12 | 0-1670 | 82 | 20W |
| RACV20-24-LP | 198-264 | 210 | 24 | 0-830 | 84 | 20W |

All LED Drivers may not be used without a load. They must be switched on the primary side only.

Noncompliance may damage the LED or reduce its lifetime.

RECOM AC/DC Converter

RACV20-LP

20 Watt Constant Voltage Single Output

















IEC/EN61347-1 certified IEC/EN61347-2-13 certified ENEC certified CB report EN55015 compliant

Specifications (measured @ Ta= 25°C, 240VAC and rated load)

| BASIC CHARACTERISTICS | | | | |
|------------------------------|-------------------|--------|--------|----------|
| Parameter | Condition | Min. | Тур. | Max. |
| Input Voltage Range | | 198VAC | 230VAC | 264VAC |
| Inrush Current | | | | 8.0A |
| Start-up Time | | | | 50ms |
| Input Frequency Range | | 47Hz | | 63Hz |
| No Load Power Consumption | | | | 0.5W |
| Power Factor | full load, 230VAC | | | 0.55 |
| Internal Operating Frequency | full load | 35kHz | | 140kHz |
| Output Dipple Veltage (1) | 12Vout | | | 700mVp-p |
| Output Ripple Voltage (1) | 24Vout | | | 500mVp-p |
| Notes: | | | | |

REGULATIONS
Parameter Condition Value
Output Accuracy ±5% max.
Line Regulation 3% max.
Load Regulation 3% max.

Note1: Measured at 20MHz Bandwidth using $0.\overline{1\mu F \& 47\mu F}$ parallel capacitor



RACV20-LP

Series

Specifications (measured @ Ta= 25°C, 240VAC and rated load)

| PROTECTION | | | |
|-----------------------------------|------------------------------|--|--|
| Parameter | Condition | Value | |
| Input Fuse | external fuse is recommended | T1A | |
| Open Circuit Protection (OCP) | | auto recovery after fault condition is removed | |
| Over Load Protection (OLP) | | auto recovery after fault condition is removed | |
| Over Voltage Protection (OVP) | | auto recovery after fault condition is removed | |
| Over Temperature Protection (OTP) | 110°C Tcase | auto recovery after fault condition is removed | |
| Isolation Voltage | I/P to O/P | 3.75kVAC / 1 minute | |


Maximum loading of automatic circuit breakers

* @ 230VAC, 10hm, 90° phase angle and max. load

| Circuit Breaker | Circuit Breaker Current | | | |
|-----------------|-------------------------|-----|-----|-----|
| Тур | 10A | 16A | 20A | 25A |
| В | 11 | 18 | 23 | 29 |
| С | 24 | 39 | 49 | 61 |

| ENVIRONMENTAL | | | |
|-----------------------------|----------------|----------------------------|--|
| Parameter | Condition | Value | |
| Operating Temperature Range | | -20°C to +45°C | |
| Maximum Case Temperature | | +85°C | |
| Operating Altitude | | 2000m | |
| Operating Humidity | non-condensing | 5% to 85% RH | |
| IP Rating | | IP20 | |
| Pollution Degree | | PD2 | |
| Design Lifetime | | 30 x 10 ³ hours | |

Derating Graph

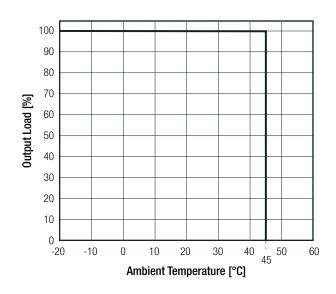



RACV20-LP

Series

Specifications (measured @ Ta= 25°C, 240VAC and rated load)

| SAFETY AND CERTIFICATIONS | | |
|--|---|---|
| Certificate Type (Safety) | Report Number | Standard |
| Lamp controlgear Part 1: General and safety requirements (CB Scheme) | | IEC61347-1:2015+A1:2017, 3rd Edition |
| Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules (CB Scheme) | 371338 | IEC61347-2-13:2014+A1:2016, 2nd Edition |
| Lamp controlgear Part 1: General and safety requirements (LVD) | | EN61347-1:2015 |
| Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules (LVD) | | EN61347-2-13:2014 + A1:2017 |
| Lamp controlgear Part 1: General and safety requirements | | EN61347-1:2008 + A2:2013 |
| Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules | 371338 | EN61347-2-13:2014 |
| DC or AC supplied electronic control gear for LED modules Performance requirements | 371338 | IEC62384:2006 1st Edition + A1:2009 |
| DC or AC supplied electronic control gear for LED modules Performance requirements | 371330 | EN62384:2006 + A1:2009 |
| EAC | RU-AT.49.09571 | TP TC 004/2011 |
| RoHS 2 | | RoHS 2011/65/EU + AM2015/863 |
| EMC Compliance | Condition | Standard / Criterion |
| Limits and methods of measurement of radio disturbance characteristics of electrical | | EN55015:2013 + A1:2015 |
| lighting and similar equipment | 371338 | LN33013.2013 + A1.2013 |
| Equipment for general lighting purposes – EMC immunity requirements | 3/1330 | EN61547:2009 |
| Assessment of lighting equipment related to human exposure to electromagnetic fields | | EN62493:2015 |
| ESD Electrostatic discharge immunity test | ±8kV Air Discharge, ±4kV Contact Discharge | EN61000-4-2:2009, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | 3V/m | EN61000-4-3:2006 + A2:2010, Criteria A |
| Fast Transient and Burst Immunity | ±0.5kV (DC Output) ±1kV (AC Input) | EN61000-4-4:2012, Criteria A |
| Surge Immunity | ±0.5kV (AC Input) | EN61000-4-5:2014 + A1:2017, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | AC Power Port 3V | EN61000-4-6:2014, Criteria A |
| Voltage Dips and Interruptions | Voltage Dips >95% | EN61000-4-11:2004 + A1:2017, Criteria B |
| Voltage Dips and Interruptions | Voltage Dips 30% | EN61000-4-11:2004 + A1:2017, Criteria B |
| Limits of Harmonic Current Emissions | | EN61000-3-2:2014, Class C |
| Limits of Voltage Fluctuations & Flicker | | EN61000-3-3:2013, Clause 5 |

| DIMENSION and PHYSICAL CHARACTERISTICS | | | |
|--|------|-----------------------|--|
| Parameter | Туре | Value | |
| Material | case | plastic (UL94V-2) | |
| Dimension (LxWxH) | | 128.0 x 50.0 x 13.0mm | |
| Weight | | 75g | |
| | | | |

continued on next page

www.recom-power.com

REV.: 2/2019


L-3




RACV20-LP

Series

Specifications (measured @ Ta= 25°C, 240VAC and rated load)

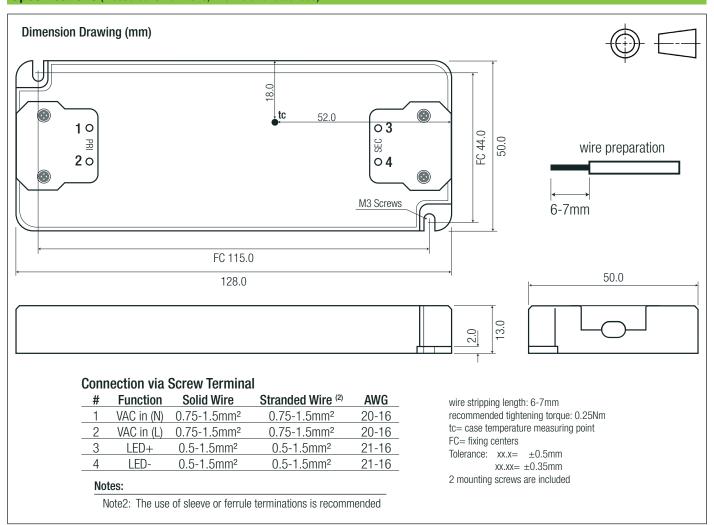

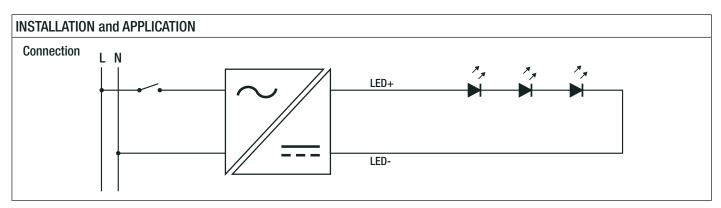

| PACKAGING INFORMATION | | | |
|-----------------------------|----------------|------------------------|--|
| Parameter | Туре | Value | |
| Packaging Dimension (LxWxH) | oordboord Dov | 265.0 x 139.0 x 62.0mm | |
| Packaging Quantity | cardboard Box | 10pcs | |
| Storage Temperature Range | | -20°C to +70°C | |
| Storage Humidity | non-condensing | 5% - 85% RH | |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.