20W / Input: 100V-277VAC

## RECOM AC/DC Converter

#### **FEATURES**

- 85-305VAC wide input range
- Full load power ratings to 55°C
- 23 Watt Boost Power
- Optional CV/CC overcurrent limited
- EN55032 "B": O/P either floating or earth referenced
- Surge immunity 2kVAC: L-N &; 4kV: L; N Earth
- OVC III over voltage category up to 3000m
- Tool free push in terminals: up to 2.5mm<sup>2</sup> wires
- DIN-Rail or screw mountable
- IP40 ingress protected
- 3 year warranty



83.0 x 26.4 x 29.5mm (3.2 x 1.0 x 1.1 inch) 70.6g (0.15 lbs)

#### **APPLICATIONS**













**SAFETY & EMC** 

















#### DESCRIPTION

RAC20NE-K/277/EPID, power supplies are shaped to flexibly fit into different mounting conditions, regardless of whether back panel mounting with screws or clipping onto DIN rails is required. Apart from the push-in terminals for tool-free connection of wire cross-sections of up to 2.5mm², the modules are IP40 ingress protected. Despite their extremely compact design, the class II units offer increased resistance to surges up to 2kV L-N and 4kV to earth as well as EMI-interference filters to withstand EN55032 Class "B" requirements under floating and earth reference load conditions such as PELV. Fully certified to safety standards UL/IEC/EN62368, IEC61347, IEC61558 and EN60335 with overvoltage category OVC III for worldwide nominal input voltages 100-277 VAC under full load from -40°C to 55°C or with power limitation up to 85°C, constant regulated output voltage from 5V to 36Vdc are available, and CV with constant current overload limitation protection is available as an option.

SELECTION GUIDE (CONSTANT VOLTAGE OPERATION)						
Part Number	Input Voltage Range [VAC]	Output Voltage [VDC]	Output Current nom. [mA]	Boost Current max <sup>(1)</sup> [mA]	Efficiency <sup>(2)</sup> typ. [%]	Output Power continuous [W]
RAC20NE-05SK/277/EPID	85-305	5	3000	4600	86	15
RAC20NE-12SK/277/EPID	85-305	12	1667	1916	87	20
RAC20NE-24SK/277/EPID	85-305	24	833	1150	87	20
RAC20NE-36SK/277/EPID	85-305	36	555	638	88	20

SELECTION GUIDE (CONSTANT CURRENT OPERATION)					
Part Number	Input Voltage Range [VAC]	Output Voltage nom. [VDC]	Output Current rated [mA]	Efficiency <sup>(2)</sup> typ. [%]	Output Power continuous [W]
RAC20NE-24SK/277/CC/EPID	85-305	24	833	87	20


Note1: Refer to "Boost Power Duty Cycle"

Note2: Efficiency is tested at 230VAC and full load at +25°C ambient

20W / Input: 100V-277VAC



### **Model Numbering**



Note3: add suffix "/CC" for constant current operation without suffix= standard constant voltage operation

Parameter	Conditi	on	Min.	Тур.	Max.
Nominal Input Voltage	50/60	-lz	100VAC		277VAC
Operating Range (4)	47-63	-lz	85VAC		305VAC
Input Current	115/230/2	77VAC			450mA
		115VAC			20A
Inrush Current	cold start at 25°C	230VAC			40A
		277VAC			50A
No Load Power Consumption	1				100mW
Ecodesign Standby Mode Use	P <sub>IN</sub> = 0.5	5W	0.34W		
(Available output power for stated input	P <sub>IN</sub> = 1.0W		0.74W		
power)	P <sub>IN</sub> = 2.0	1.6W			
Input Frequency Range	AC Input		47Hz		63Hz
Minimum Load			0%		
Power Factor				0.6	
Start-up time					150ms
Rise time			40ms		
Hold-up time	230VAC		50ms		
Internal Operating Frequency					150kHz
Output Ripple and Noise (5)	20MHz	BW			1% Vout


Note4: The products were submitted to all safety files at AC-operation (90-305VAC).


Note5: Measurements are made with a 0.1µF MLCC & 10µF E-cap in parallel across output (low ESR)

The test setup can have an impact on ripple noise values (placement of scope probe, capacitors, it's specifications, wires, PCB tracks, distances, etc.)

**PRELIMINARY** 

#### 5Vout

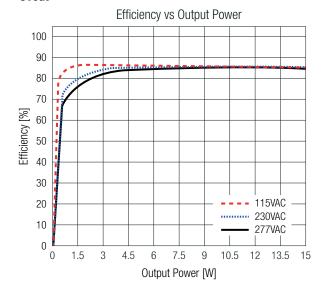

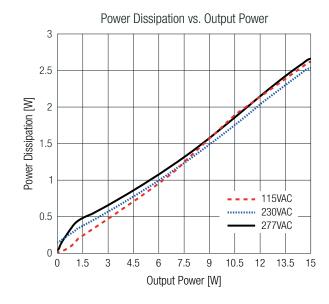



20W / Input: 100V-277VAC



BASIC CHARACTERISTICS (measured @ T<sub>AMB</sub>= 25°C, nom. V<sub>IN</sub>, full load and after warm-up unless otherwise stated)

#### others

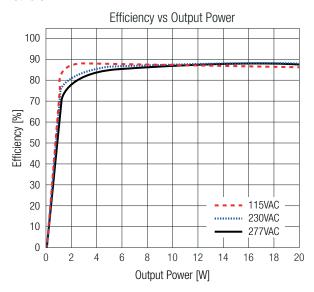


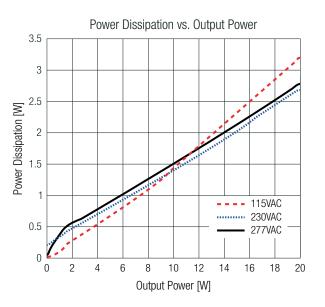


REGULATIONS (measured @ T <sub>AMB</sub> = 25°C, nom. V <sub>IN</sub> , full load and after warm-up unless otherwise stated)			
Parameter	Condition	Value	
Output Accuracy		±2.0% max.	
Line Regulation	low line to high line, full load	±1.0% max.	
Load Regulation (6)	10% to 100% load	2.0% max.	
T	25% load step change	4.0% max.	
Transient Response	recovery time	500µs typ.	

Note6: Operation below 10% load will not harm the converter, but specifications may not be met

#### Deviation vs. Load

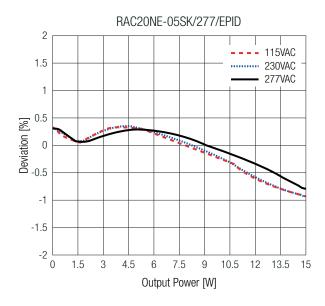

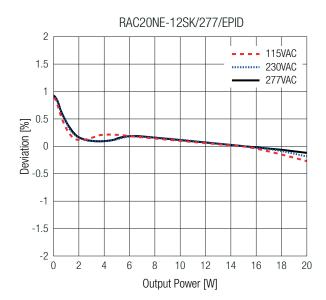



20W / Input: 100V-277VAC



REGULATIONS (measured @ T<sub>AMB</sub>= 25°C, nom. V<sub>IN</sub>, full load and after warm-up unless otherwise stated)


#### Deviation vs. Load

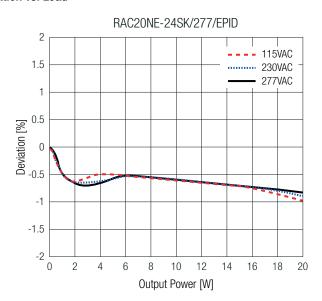

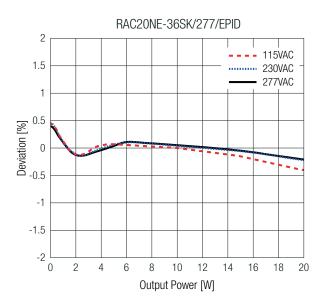

PROTECTIONS (measured @ T <sub>AMB</sub> = 25°C, nom. V <sub>IN</sub> , full load and after warm-up unless otherwise stated)				
Parameter		Ту	Value	
Input Fuse		inte	ernal	T2A, slow blow type
Short Circuit Protection (SCP)		below	100mΩ	hiccup mode; auto recovery
Over Current Protection (OCD)		"/277/EPI	D" versions	120% - 150%, hiccup mode
Over Current Protection (OCP)	"/277/CC/EPID" v	version; refer to "Ou	constant current limitation until hiccup mode	
Over Voltage Protection (OVP)			120% - 180%, latch off mode	
Over Voltage Category (OVC)	acco	ording to 62368-1,	OVC III (3000m)	
Over Voltage Category (OVC)	6	according to 62368	OVC II (5000m)	
Over Temperature Protection (OTP)				hiccup mode; auto recovery
Class of Equipment				Class II
loolotion Voltago	1/D to 0/D	1 minuto	according to 61558	4.2kVAC
Isolation Voltage	I/P to O/P	1 minute	according to 62368-1	6kVDC
Insulation Grade		I/P to O/P		reinforced

#### Output Voltage vs. Output Current

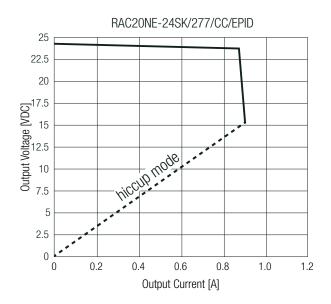

20W / Input: 100V-277VAC




,		er warm-up unless otherwise stated)	
Parameter	Conc	lition	Value
Operating Ambient Temperature Range	@ natural convection (0.1m/s)	refer to "Derating Graph"	-40°C to +85°C
Maximum Case Temperature			+95°C
Temperature Coefficient			±0.05%/K
Operating Altitude (7)	according to 62368	5000m (OVC II)	
Operating Annual 47	according to 62368-1, 6	3000m (OVC III)	
Operating Humidity			95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217, G.B.	T <sub>AMB</sub> = +25°C	1190 x 10 <sup>3</sup> hours
Design Lifetime	full load	T <sub>AMB</sub> = +25°C	130 x 10 <sup>3</sup> hours

Note7: Recognized by safety agency for safe operation up to 5000m. High altitude operation may impact the performance and lifetime. Please contact RECOM tech support for advice

#### **Derating Graph for continuous loads**

(@ Chamber, any orientation and natural convection 0.1m/s)

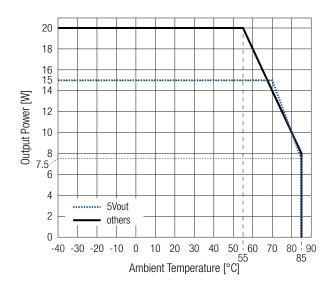

### BOOST POWER DUTY CYCLE (EXCEPT "/CC" MODELS)

 $\begin{array}{ll} P_{\text{rated}} = \text{refer to } \text{,} \text{Derating Graph} \text{``} & [W] \\ P_{\text{Boost}} = \text{Boost power } (\leq 23\text{W}) & [W] \\ P_{\text{r}} = \text{recovery output power} & [W] \end{array}$ 

 $t_1$  = Boost time set (20s max.) [s]  $t_2$  = recovery time (min. 2 x  $t_1$ ) [s]

$$\mathbf{P_r} = \frac{P_{rated} \times (t_1 + t_2) - (P_{Boost} \times t_1)}{t_2}$$


#### Practical Example (RAC20NE-05SK/277/EPID):

Take the RAC20NE-05SK/277/EPID at 230VAC input voltage and full load at  $T_{\text{AMB}} = 80^{\circ}\text{C}$ , with natural convection.

$$\begin{array}{ll} P_{rated} &= 10W \\ P_{Boost} &= 23W \end{array}$$

$$t_{1} = 20s$$
  
 $t_{2} = 50s$ 

$$P_r = \frac{10W \times (20s + 50s) - (23W \times 20s)}{50s} = 4.8W$$

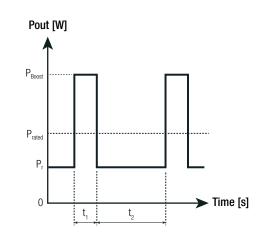

20W / Input: 100V-277VAC



SAFETY & CERTIFICATIONS			
Certificate Type (Safety)		Report Number	Standard
Audio/Video, information and communication technology equipment	ent - Part1·	Hoport Humbon	UL62368-1:2019 3rd Edition
Safety requirements 3rd Edition	iit raiti.	E491408-A6034-UL	CAN/CSA-C22.2 No. 62368-1-19 3rd Edition
Audio/Video, information and communication technology equipment	ent - Part1·		IEC62368-1:2018 3rd Edition
Safety requirements 3rd Edition	THE TAILTY	240408022	EN IEC 62368-1:2020+A11:2020
Audio/Video, information and communication technology equipment	ent - Part1:	085-240223001-000	IEC62368-1:2018 3rd Edition
Safety requirements 3rd Edition			EN IEC 62368-1:2020+A11:2020
Audio/Video, information and communication technology equipment	nt - Part1:		IEC62368-1:2018 3rd Edition
Safety requirements 3rd Edition		085-240223401-000	EN IEC 62368-1:2020+A11:2020
		04.440.04.00000.04	IEC60335-1:2010 + C1:2016 5th Edition
Household and similar electrical appliances – Safety – Part 1: Ger	neral requirements	64.110.24.02233.01	EN60335-1:2012 + A15:2021
Measurement methods for electromagnetic fields of household applia with regard to human exposure	nces and similar apparatus	64.110.24.02233.01	EN62233:2008
Safety of power transformers, power supplies, reactors and similar pro	oducts for supply voltages		IEC61558-1:2017 3rd Edition
up to 1100 V 3rd Edition		085-240223101-000	EN IEC 61558-1:2019
Safety of power transformers, power supplies, reactors and similar	r products for supply	005-240223101-000	IEC61558-2-16:2009+A1:2013 1st Edition
voltages up to 1100 V Part 2: Particular requirements			EN61558-2-16:2009+A1:2013
Lamp controlgear Part 1: General and safety requirements			IEC61347-1:2015+A1:2017 3rd Edition
Lamp controlgear Fart 1. General and Salety requirements		085-240223201-000	EN61347-1:2015+A1:2021
Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c	c. supplied electronic	000-240223201-000	IEC61347-2-13:2014+A1:2016 2nd Edition
controlgear for LED modules			EN61347-2-13:2014+A1:2017
EMC Compliance according to EN IEC61204-3	Cor	ndition	Standard / Criterion
Low voltage power supplies, d.c. output Part 3: Electromagnetic compatibility (EMC)			EN IEC 61204-3:2018
	Air: ±2, 4, 8kV Contact: ±6kV for all versions except 5Vout version		IEC61000-4-2:2008, Criteria <i>F</i>
ESD Electrostatic discharge immunity test			EN61000-4-2:2009, Criteria A
		sions except 5Vout version	
Radiated, radio-frequency, electromagnetic field immunity test	10V/m (80-1000MHz), 3V/m (1400-2000MHz),		IEC/EN61000-4-3:2006 + A2:2010
nadiated, radio-frequency, electromagnetic field infinitifity test	,	0-2700MHz)	Criteria
		4V and 36Vout versions	IEC/EN61000-4-4:2012, Criteria A
Fast Transient and Burst Immunity		V and 12Vout versions	,
,		V for all versions	IEC/EN61000-4-4:2012, Criteria
	L-N: 0.5, 1kV; for all	versions; only mode 1	IEC/EN61000-4-5:2014 + A1:2017, Criteria A
	L-N: 2kV; for all ve	ersions; only mode 1	IEC/EN61000-4-5:2014 + A1:2017, Criteria E
Surge Immunity (8)	L-PE, N-PE: 1, 2kV; for	all versions; only mode 1	IEC/EN61000-4-5:2014 + A1:2017, Criteria A
	L-PE: 4kV; for all versions; only with mode 2		IEC/EN61000-4-5:2014 + A1:2017, Criteria E
	N-PE: 4kV; for all ver	sions; only with mode 2	IEC/EN61000-4-5:2014 + A1:2017, Criteria A
Immunity to conducted disturbances, induced by radio-frequency	101/	45.00141.)	IEC61000-4-6:2013, Criteria A
fields	10Vrms (0	).15-80MHz)	EN61000-4-6:2014, Criteria A
Power Magnetic Field Immunity	30	)A/m	IEC61000-4-8:2009 / EN61000-4-8:2010
Voltage Dips and Interruptions	Dips: 100% (0.5P, 1.0P), 60%, 30%, 20%		IEC/EN61000-4-11:2004+A1:2017, Criteria A
	Interruption: 100%		IEC/EN61000-4-11:2004+A1:2017, Criteria E
Limits of Voltage Fluctuations & Flicker			EN61000-3-3:2013+A1:2019
		 ndition	Standard / Criterior
EMC Compliance according to EN55032	COI	luluon	Standard / Oritorior


Note8: Mode1: O/P did not connect to GND Mode2: O/P connected to GND


20W / Input: 100V-277VAC



DIMENSION & PHYSICAL CHARACTERISTICS			
Parameter	Туре	Value	
	case/baseplate	plastic, (UL94 V-0)	
Materials	potting	silicone, (UL94 V-0)	
	PCB	FR4, (UL94 V-0)	
Dimonoion /LyMyH\		83.0 x 26.4 x 29.5mm	
Dimension (LxWxH)		3.2 x 1.0 x 1.1 inch	
Weight		70.6g typ.	
weight		0.15 lbs	

#### **Dimension Drawing (mm)**

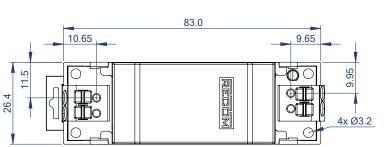

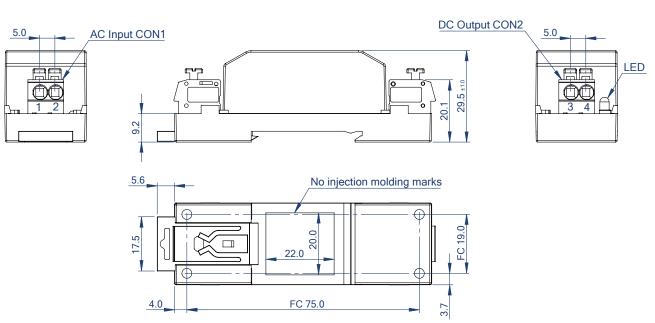

#### **Connector Information**

	AC Input (CON1)				
#	Function	Wire cross section (9)			
1	VAC in (L)	20-12 AWG (0.2-2.5mm <sup>2</sup> )			
3	VAC in (N)	Usable wire: solid/stranded			

DC Output (CON2)

#	Function	Wire cross section (9)		
3	+Vout	20-12 AWG (0.2-2.5mm <sup>2</sup> )		
4	-Vout	Usable wire: solid/stranded		
FC= Fixing centers				

Note9: Min. Wire cross section are suggested values only, and need to be aligned with the applicable safety regulation. No ferrules required for stranded wires when tool-less pushing in is not suggested.

Note10: For DIN-Rail mounting, follow the instructions under "Mounting Instruction"

Tolerance:  $xx.x = \pm 0.5mm$ 

 $xx.xx = \pm 0.25mm$ 


20W / Input: 100V-277VAC




### **INSTALLATION & APPLICATION**

#### **Mounting Instruction**

Mounting Rail: Standard TS35 DIN Rail in accordance with EN 60715

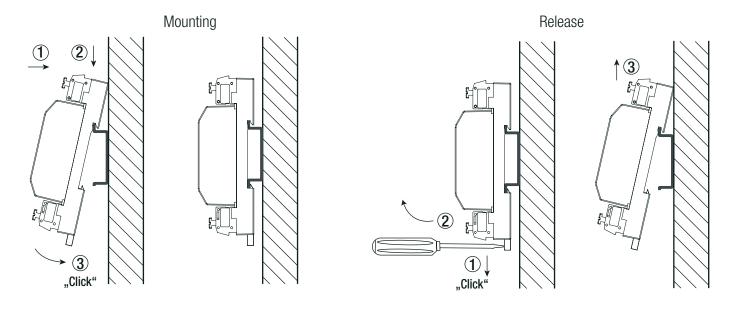

#### Installation Instruction (11)

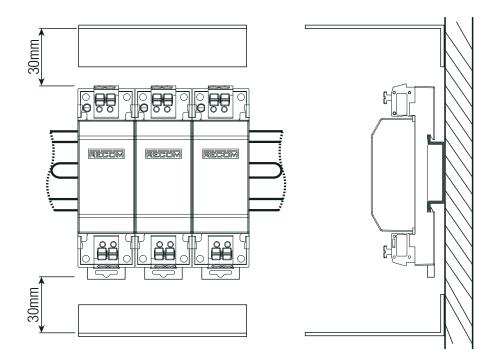


Note11: Panel mount installations can be realized in any orientation. No distance to adjacent components is required for thermally effective contact.

In pure convection cooled ambient at least two of four long sides shall have access to air convection (eg 2cm distance)

20W / Input: 100V-277VAC



### **BLOCK DIAGRAMM**

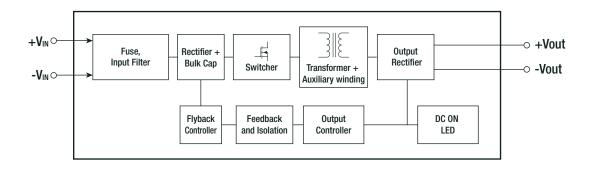

PACKAGING INFORMATION			
Parameter	Туре	Value	
Packaging Dimension (LxWxH)	box	365.0 x 210.0 x 46.0mm	
Packaging Quantity		22pcs	
Storage Temperature Range		-40°C to +90°C	
Storage Humidity		95% RH max.	

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.